

VNKT/KTM
TRIBHUVAN INTLJEPPESEN
30 MAY 25 10-1PKATHMANDU, NEPAL
AIRPORT BRIEFING

1. GENERAL

1.1. ATIS

*ATIS 127.0

1.2. FLIGHT PROCEDURES

1.2.1. PAST UNDERSTANDING ATC-PILOT INTERACTION

Landing sequence will be issued by approach and all ACFT are to strictly adhere to this sequence. Approach sequence is to be established by D10.0 and no overtaking is permitted after D10.0.

Departure sequences to be provided on first come first serve basis with ATC discretion.

When RWY 20 in use

- Inbound traffic from West is to enter valley via KAKANI pass and from East via NAGARKOT pass.
- Departing traffic is to leave valley via BIRATNAGAR pass for East and BHARATPUR pass for West.

When RWY 02 in use

- Enter valley via BHARATPUR pass from West and BIRATNAGAR pass from East and leave valley via KAKANI and NAGARKOT pass.

Unless otherwise cleared by ATC, it is agreed that:

VFR rules to be strictly followed by pilots. Traffic avoidance service may be provided on pilots' request. Upon receiving such request ATC will try to provide positive separation as far as possible.

Pilots to report traffic in sight to release restriction for climb and descent.

Maintain 10NM TCAS separation from ACFT at same level while following High Level Mountain Flight Procedure.

1.2.2. RNP (AR) PROCEDURE REQUIREMENTS AND APPROVAL

1.2.2.1. INTRODUCTION

The RNP AR APCH and RNP1 STARs are designed for VNKT in accordance with the criteria as stipulated in the ICAO PANS-OPS (DOC 8168) Vol. II and ICAO RNP AR Manual (DOC 9905). However, for RNP AR Departure, besides the documents mentioned above, the criteria used were developed based on FAA Order 8260.58B provisions too.

The RNP AR Approach and Departure Procedures at VNKT are designed to enhance the overall safety of the ACFT operation by facilitating the ACFT energy management and to improve the APT access, while taking into account ATC constraints.

1.2.2.2. APPROVED USERS, EQUIPMENT AND OPERATIONS

For the VNKT RNP AR approach and departure procedures, the operators shall ensure that they hold all necessary operational approvals as part of the Operations Specifications of the AOC from its authority including the Baro-VNAV approval in order to conduct the RNP AR approach and departure procedures to and from VNKT.

The operator must have a special authorization from its authority in order to use the RNP AR approaches. (Ref to EASA AIR-OPS, FAA Advisory Circular 90-101A Change 1, Approval Guidance for RNP Procedures with Authorization Required, or equivalent).

In order to get authorization for RNP AR departure, the operator must have acquired RNP AR APCH authorization from its authority and meet some additional requirements as mandated by such authority.

The operators shall seek approval or authorization from Civil Aviation Authority of Nepal to conduct VNKT RNP AR approach and departure procedures at VNKT.

VNKT/KTM
TRIBHUVAN INTL

JEPPESEN
30 MAY 25 **10-1P1**

KATHMANDU, NEPAL
AIRPORT BRIEFING

1. GENERAL

The operator is responsible of conducting a Flight Operational Safety Assessment (FOSA) including the Flight Simulation of the procedure. For some procedures, deviations to criteria exist, and mitigation means have to be proposed by the operator as part of their FOSA activities. Some justifications are based on validation activities to be conducted during the FOSA by the airlines part of their RNP AR Operational approval.

The RNP AR approach and departure procedures require a navigation accuracy down to RNP 0.3 and RF-leg capability.

The vertical guidance is based on Baro-VNAV with GNSS and requires RNAV equipment which uses barometric altimeter input.

The RNP STARs are based on the use of RNAV system with RNP 1.0 navigation specification and are designed to be used only in conjunction with corresponding RNP AR approach procedures.

1.2.2.3. RAIM CHECK

During flight planning or before dispatching the ACFT, the pilot shall ensure a RAIM check with a mask angle appropriate to the terrain (Minimum mask angle 5°).

1.2.2.4. LIMITATIONS OF THE PROCEDURES

The procedure is designed for a temperature down to -10°C for RNP AR APCH procedures. (Temperature correction of the barometric altimeter is not required.)

1.2.2.5. RNP CAPABILITY LOST

If the RNP capability is lost, ATC shall be informed as soon as possible about the alternate course of action from the pilots of the concerned ACFT.

1.3. APT COLLABORATIVE DECISION MAKING (A-CDM)

1.3.1. GENERAL

All flights operated at the APT are required to participate in the A-CDM to optimize APT operations by sharing accurate and timely information among APT stakeholders.

Detailed information on A-CDM processes can be found on the following website: <https://acdm.tiaairport.com.np>

For the application of the A-CDM account or any other queries contact the TIA ATFM/A-CDM team at atfm@caanepal.gov.np.

ACFT operators may also contact their GH directly on queries regarding TOBT submission.

Target Off-Block Time (TOBT)

The time that an ACFT Operator (AO)/Ground Handler (GH) estimates that an ACFT will be ready, all doors closed, passenger step removed, push-back vehicle available, and ready to start-up/push-back immediately upon receiving approval from GND (SMC).

Target Start Up Approval Time (TSAT)

The time provided by ATC taking into account TOBT and/or the traffic situation that an ACFT can expect start-up/push-back approval.

1.3.2. A-CDM OPERATIONAL TRIAL

The operating hours of the A-CDM will be MON-SUN from 0115-0715UTC (0700-1300LT) and apply to departing ACFT whose flight plan EOBT contains the relevant operating hours.

During the operational trial, AO/GH is not required to submit the initial TOBT as long as it is the same as EOBT stated in the flight plan, and EOBT will be processed as TOBT.

Subsequently, AO/GH is required to update the TOBT for all departing flights.

Then, the A-CDM system calculates the TSAT and displays it on the A-CDM web screen for application in actual ACFT operations.

VNKT/KTM
TRIBHUVAN INTLJEPPESEN
30 MAY 25 10-1P2KATHMANDU, NEPAL
AIRPORT BRIEFING

1. GENERAL

1.3.3. A-CDM PRE-DEPARTURE PROCEDURES

The A-CDM procedures apply to all departing IFR/VFR flights except for Mercy flights, SAR flights, VVIP flights, helicopter flights, and ACFT engaged in special missions.

The A-CDM system will automatically calculate a TSAT for each departing flight, taking into account factors such as the TOBT submitted by AO/GH, Variable Taxi Times (VTT), predetermined departure intervals, etc. A pre-departure sequence is determined from the calculated TSATs; therefore the accuracy of the TOBT is crucial for an optimal TSAT.

AO/GH is required to submit TOBT no later than 30 minutes prior to EOBT via a special A-CDM website. TOBT must be submitted to an accuracy of ± 5 minutes. Once TSAT is calculated/displayed by the A-CDM system at TOBT -20 minutes, the TOBT can only be updated not more than three times to ensure a stable operation.

AO/GH is strongly encouraged to update TOBT as soon as any change in the status of the ACFT readiness for start-up/push-back is made available. TOBT can never be earlier than 15 minutes prior to EOBT nor later than 30 minutes after EOBT.

AO/GH is required to delete the submitted TOBT in the following cases. If the TOBT is deleted, the TSAT is automatically deleted as well. If the TOBT is changed, AO/GH is required to submit a new TOBT.

- TOBT becomes unknown (e.g., technical problems with the ACFT);
- The permitted number of TOBT updates (three times) after the calculation of the TSAT has been exceeded.

If a delay of more than 30 minutes is expected, AO/GH is required to revise the EOBT via AFTN using a changed DLA message. AO/GH should also take into account the validity period of Air Defense Clearance (ADC) for international flights.

AO/GH is required to notify the pilot of TSAT initially calculated/displayed by the A-CDM system and its changes.

1.3.4. A-CDM START-UP PROCEDURES

The pilot is required to ensure the ACFT is ready for start-up/push-back within ± 5 minutes of TOBT. If the ACFT is not ready within ± 5 minutes of the last reported TOBT, the pilot is required to notify AO/GH to update the TOBT accordingly.

The pilot is required to contact GND and request ATC clearance within ± 5 minutes of TOBT along with the required information, such as destination, proposed altitude/FL, parking stand, persons on board, received ATIS code, etc.

ATC will notify the pilot of last-minute changes to TSAT, if any.

The pilot is required to contact GND and request start-up/push-back within ± 5 minutes of TSAT. ATC may approve start-up/push-back if the ACFT is ready even before the TSAT, taking into account the ground traffic movement.

If an ACFT is unable to start-up/push-back by TSAT +5 minutes due to being unready, the TSAT will be automatically cancelled. The pilot is required to notify AO/GH to update the TOBT for a new TSAT before requesting start-up/push-back.

If the delay in start-up/push-back is due to ATC instruction taking into account the ground traffic movement, the TSAT will remain valid even if it exceeds TSAT +5 minutes. TOBT need not be updated in such a situation.

VNKT/KTM
TRIBHUVAN INTL

JEPPESEN
30 MAY 25 10-1P3

KATHMANDU, NEPAL
AIRPORT BRIEFING

1. GENERAL

1.3.5. NOTIFICATION OF OPERATIONAL TRIAL PERIOD

The operational trial period will be notified via NOTAM.

If the operational trial needs to be suspended for any reason, the suspension and eventual restarting will be notified via NOTAM, ATIS, ATS Message Handling System (AMHS) and the A-CDM website.

1.4. AIR TRAFFIC FLOW MANAGEMENT (ATFM) FOR ARRIVING ACFT

1.4.1. GENERAL

The objective of ATFM is to ensure optimal traffic flow when demand is expected to exceed the available capacity of the ATC system. It comprises activities related to traffic organization and handling in a way that is safe, orderly, expeditious and kept within the capacity.

Detailed information on ATFM processes for arriving ACFT can be found on following website: <https://acdm.tiaairport.com.np>

Ground Delay Program (GDP)

A traffic management process administered by ATC when ACFT are held on the ground. The purpose of the program is to limit airborne holding. Ground delay programs, in principle, provide for equitable assignment of delays to all airspace users.

Calculated Take-Off Time (CTOT)

The time provided by ATC, taking into account the traffic situation at the APT, that an ACFT has been calculated to take off. The CTOT has a tolerance of -5 to +10 minutes.

1.4.2. ATFM OPERATIONAL TRIAL

The trial will be implemented in two phases to allow all stakeholders involved an opportunity to review and refine their planned ATFM workflow processes before actual implementation.

The operating hours of the ATFM will be MON-SUN from 0115-0715UTC (0700-1300LT) and apply to departing ACFT whose flight plan ETA contains the relevant operating hours.

Operational Trial Phase 1

The ATFM system calculates the CTOT for ACFT departing from Pokhara Intl APT to TIA and displays it on the A-CDM web screen for the application of GDP in actual ACFT operations at the APT.

Operational Trial Phase 2

The ATFM system calculates the CTOT for ACFT departing from all domestic APTs to TIA and displays it on the A-CDM web screen for the application of GDP in actual ACFT operations at those APTs.

1.4.3. ATFM PRE-DEPARTURE PROCEDURES

The ATFM procedures apply to all departing IFR/VFR flights from domestic APTs to TIA, except for Mercy flights, SAR flights, VVIP flights, helicopter flights, and ACFT engaged in special missions.

The ATFM system will automatically calculate a CTOT for each departing flight, taking into account factors such as the Estimated Off-Block Time (EOBT), Variable Taxi Times (VTT), Total Estimated Elapsed Time (TEET), predetermined approach intervals, etc.

CTOT is calculated/displayed by the ATFM system by -25 minutes of the EOBT of the subject ACFT whenever the anticipated arrival delay exceeds 10 minutes.

In order to ensure the effectiveness of ATFM, the Aircraft Operator (AO) or Ground Handler (GH) is required to submit a flight plan at least one hour before the EOBT whenever possible.

If a delay of more than 30 minutes is expected, AO or GH is required to revise the EOBT via AFTN using a changed DLA message.

VNKT/KTM
TRIBHUVAN INTLJEPPESEN
28 MAR 25 (10-1P4)KATHMANDU, NEPAL
AIRPORT BRIEFING

1. GENERAL

1.4.4. ATFM START-UP PROCEDURES

The pilot is required to ensure the ACFT is ready for start-up within ± 5 minutes of EOBT.

ATC will notify the pilot of CTOT upon initial contact and thereafter update CTOT changes, if any.

The pilot is required to contact ATC and request start-up so that the ACFT can take off between -5 minutes and +10 minutes of the assigned CTOT. ATC will also issue the take-off clearance so that the ACFT can take off within the same period, taking into account the traffic situation.

1.4.5. NOTIFICATION OF OPERATIONAL TRIAL PERIOD

The operational trial period for Phase 1 and Phase 2 will be notified via NOTAM.

If the operational trial needs to be suspended for any reason, the suspension and eventual restarting will be notified via NOTAM, ATS Message Handling System (AMHS) and the A-CDM website.

1.5. OTHER INFORMATION

1.5.1. BIRD ACTIVITY

Normally from the month of July/August to November/December, cases of bird concentrations and bird strikes at or in the vicinity of APT has been reported now and then. In other months stray birds may be encountered occasionally.

Lots of measures have been adopted to control these bird concentrations including driving them away through guards and security personnel.

2. DEPARTURE

2.1. VISUAL DEPARTURE


A visual departure is a departure by an IFR flight when either part or all of an instrument departure procedure (e.g. SID) is not completed and the departure is executed in visual reference to terrain.

An IFR flight may be cleared to execute a visual departure upon request of the pilot or if initiated by the controller and accepted by the pilot.


To execute a visual departure, the ACFT take-off performance characteristics will allow them to make an early turn after take-off. Visual departure will be executed under the following conditions:

- the meteorological conditions in the direction of take-off and the following climb-out will not impair the procedure up to an altitude as published in this manual and in AIP Nepal, e.g. MFA or MSA;
- the procedure will be applied during the daytime when VMC exists.
- the pilot will be responsible for maintaining obstacle clearance until the specified MSA or MEA. Further clearance (route, heading, point) will be specified by ATC; and
- separation will be provided between an ACFT cleared to execute a visual departure and other departing and arriving ACFT.


Prior to take-off, the pilot should agree to execute a visual departure by providing a read-back of the ATC clearance.

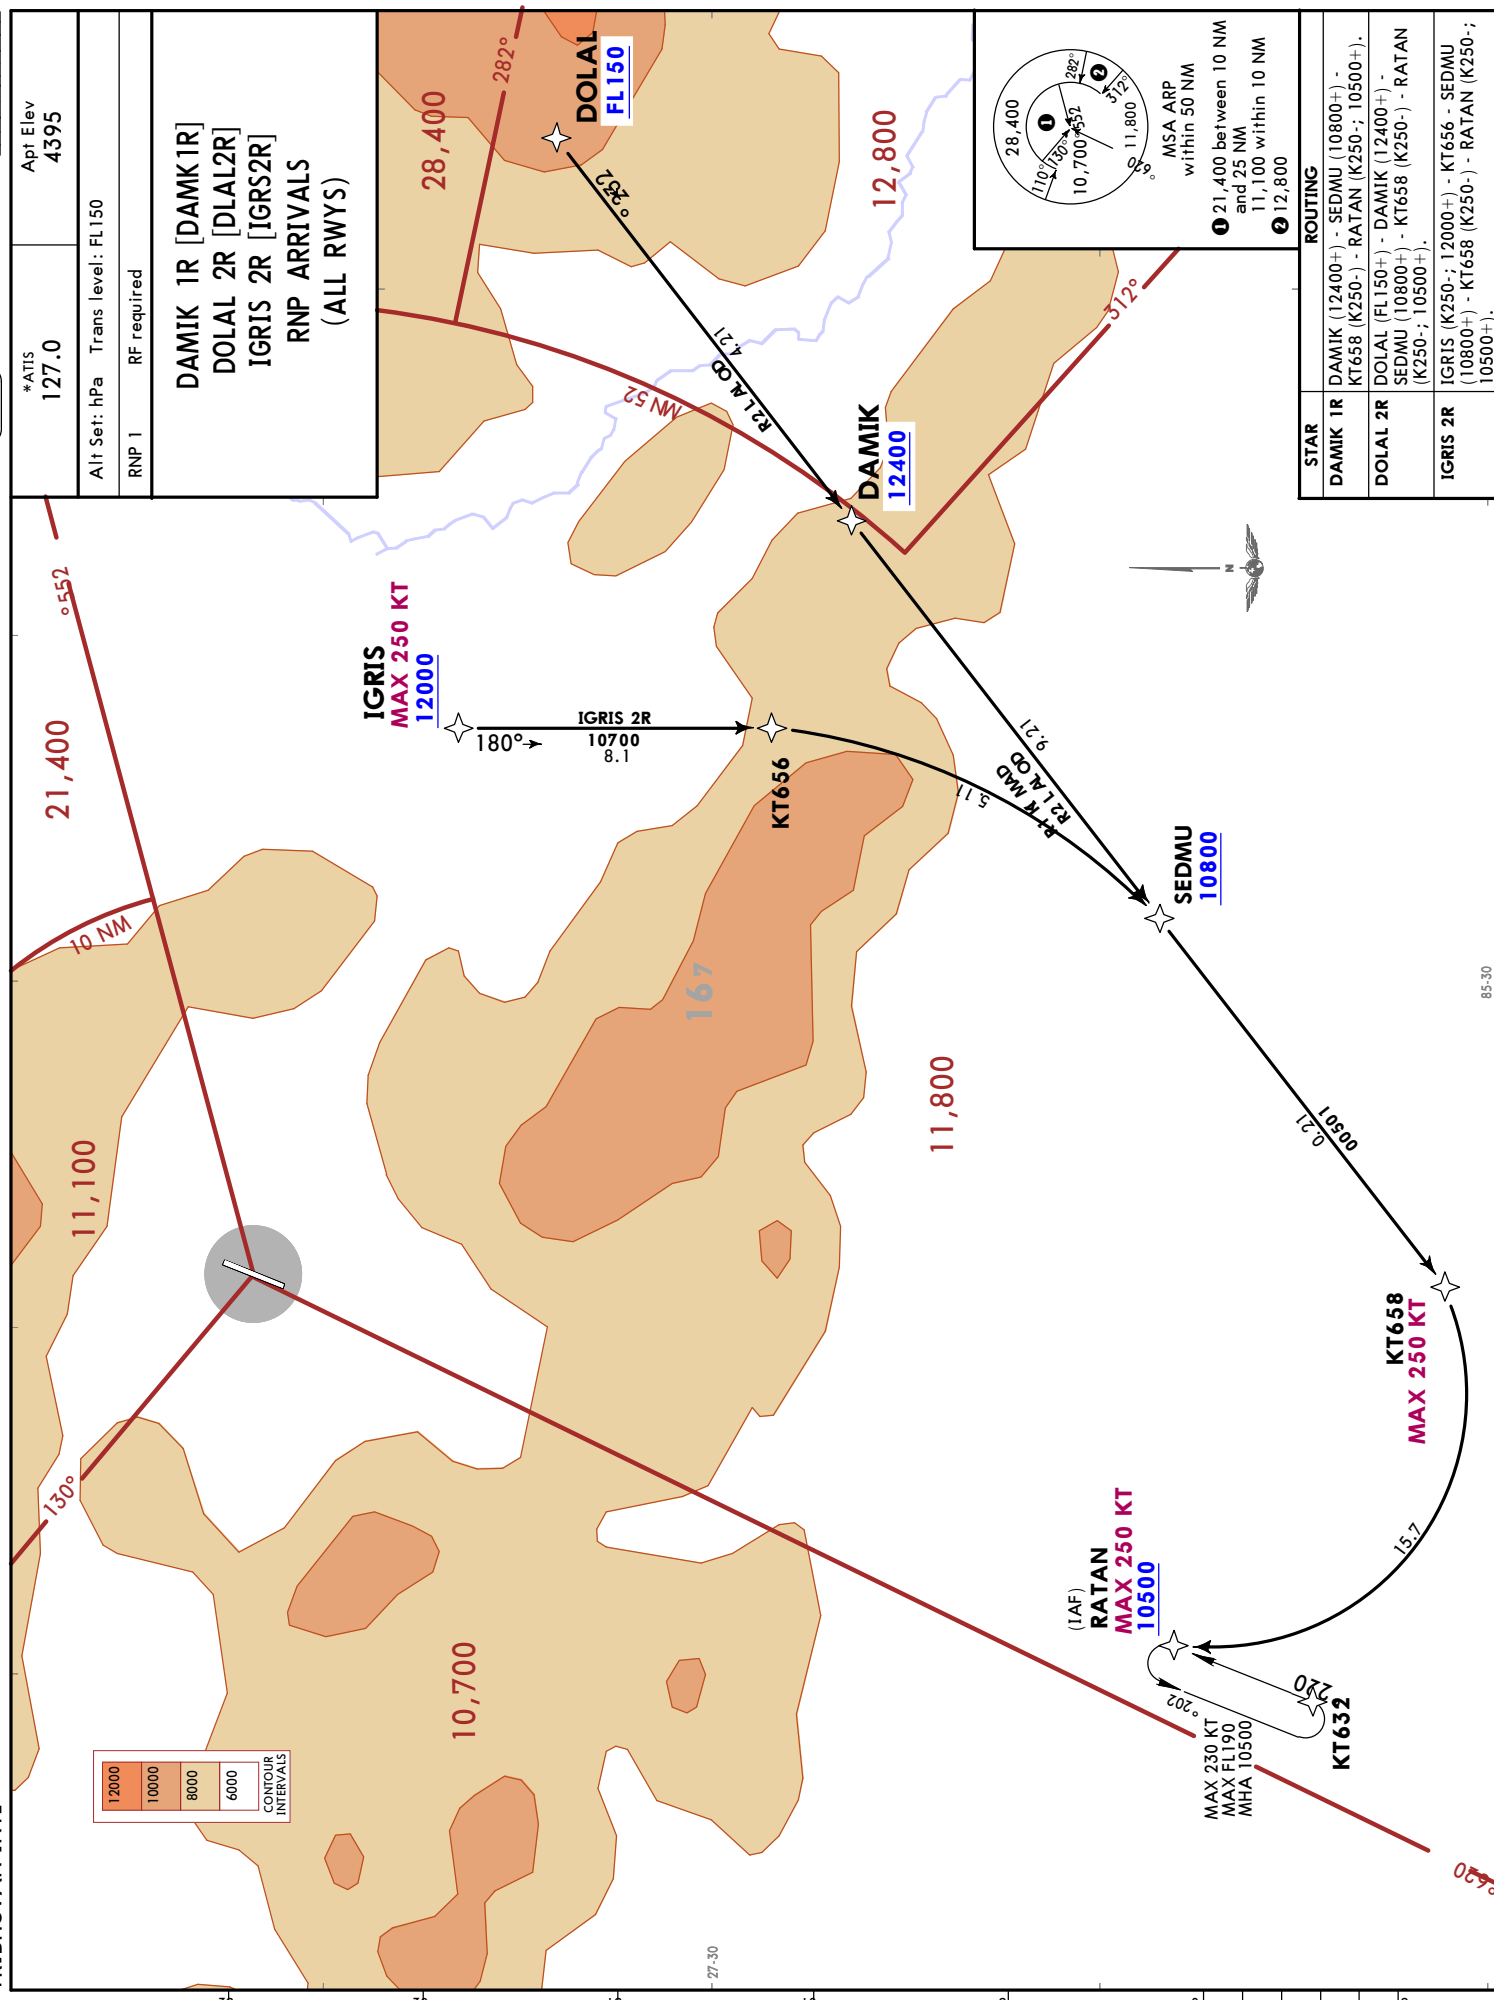

*ATIS	127.0	Apt Elev	4395
Alt Set: hPa	Trans level: FL150		
RNP 1	RF required		
DAMIK 1R [DAMK1R] DOLAL 2R [DLAL2R] IGRIS 2R [IGRS2R] RNP ARRIVALS (ALL RWYS)			



STAR	ROUTING
DAMIK 1R	DAMIK (12400+) - SEDMU (10800+) - KT658 (K250-) - RATAN (K250-; 10500+).
DOLAL 2R	DOLAL (FL150+) - DAMIK (12400+) - SEDMU (10800+) - KT658 (K250-) - RATAN (K250-; 10500+).
IGRIS 2R	IGRIS (K250-; 12000+) - KT656 - SEDMU (10800+) - KT658 (K250-) - RATAN (K250-; 10500+).




	STAR	ROUTING
	KIMTI 2R	KIMTI (FL170+) - KT646 - KT644 - MUNAL - KT642 - KT640 (K270-) - RATAN (K250-; 10500+).
	MUNAL 2R	MUNAL (10500+) - KT642 - KT640 (K270-) - RATAN (K250-; 10500+).

CHANGES: New procedures at this airport (procedures transferred).

VNKT/KTM
TRIBHUVAN INTL

JEPPESSEN
13 MAY 22 10-2D Eff 19 May


KATHMANDU, NEPAL
RNAV STAR

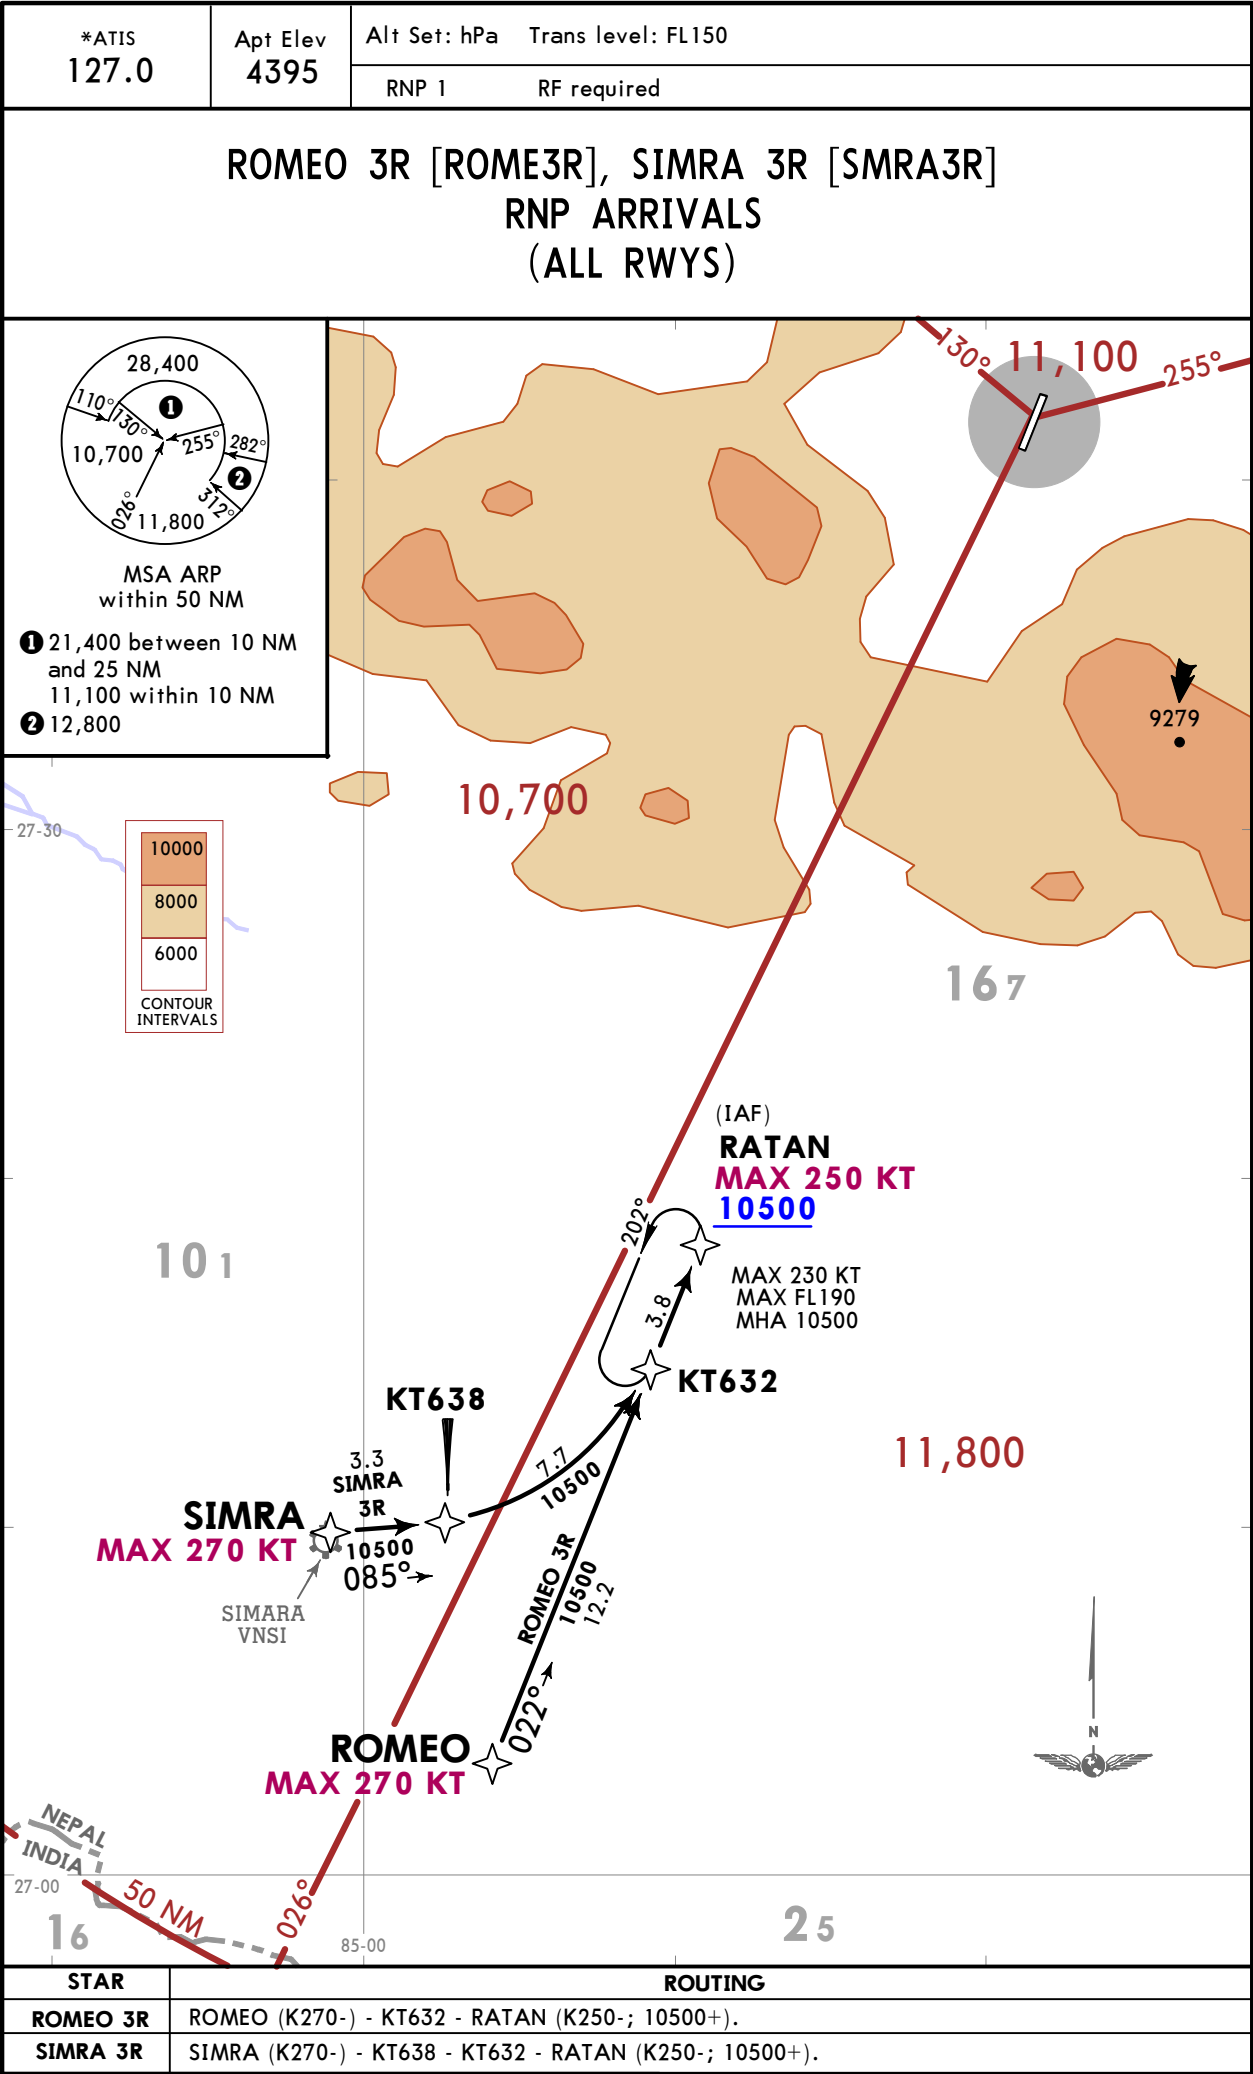

VNKT/KTM
TRIBHUVAN INTL

JEPPESEN
13 MAY 22 (10-2E) Eff 19 May

KATHMANDU, NEPAL

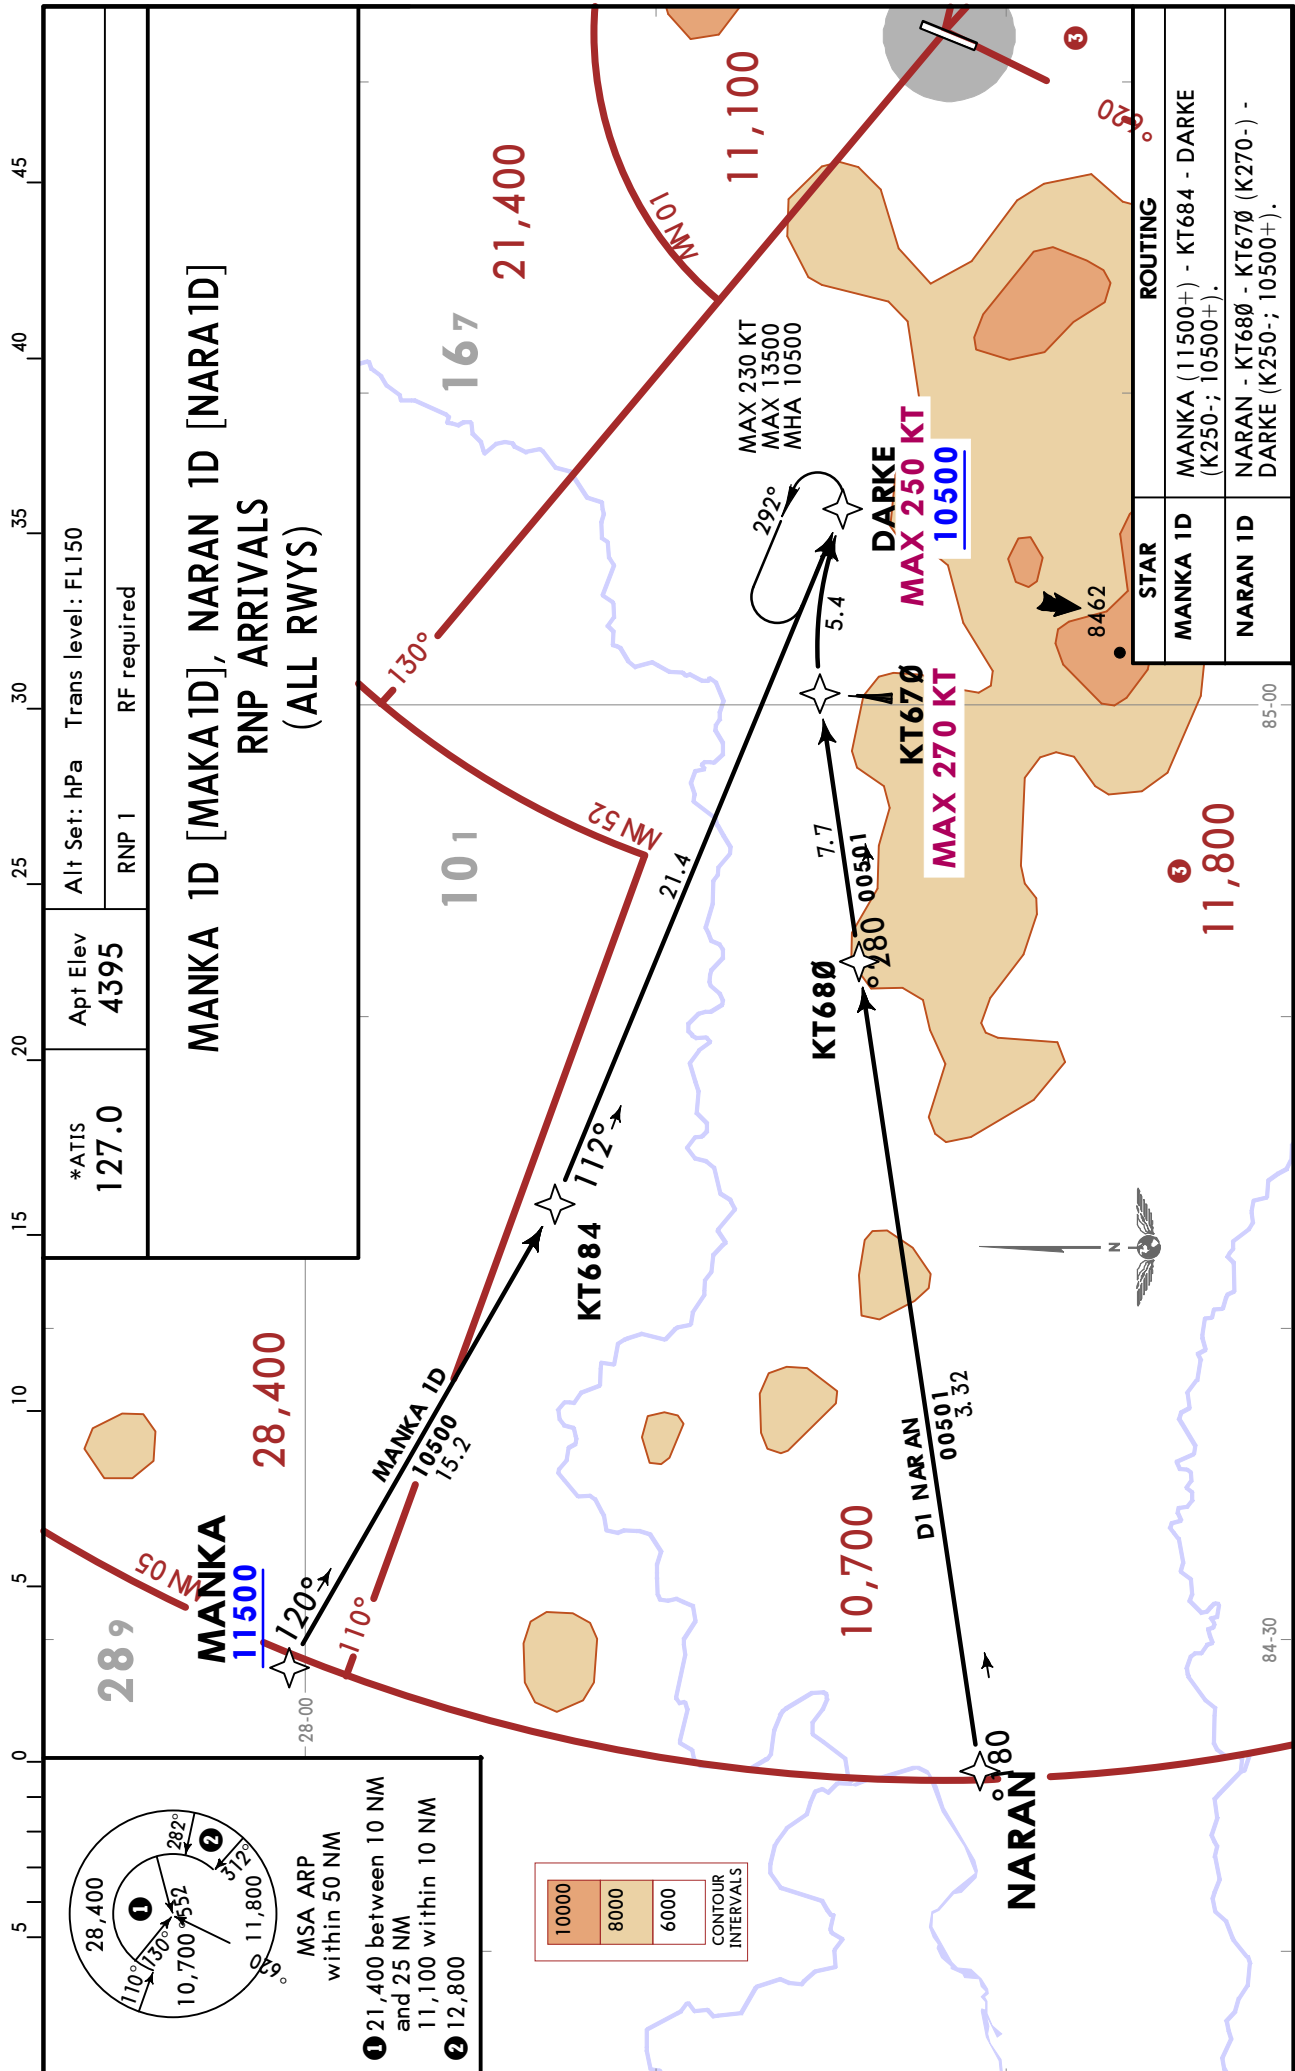RNAV STAR


VNKT/KTM
TRIBHUVAN INTL

JEPPESSEN

KATHMANDU, NEPAL

13 MAY 22

10-2F

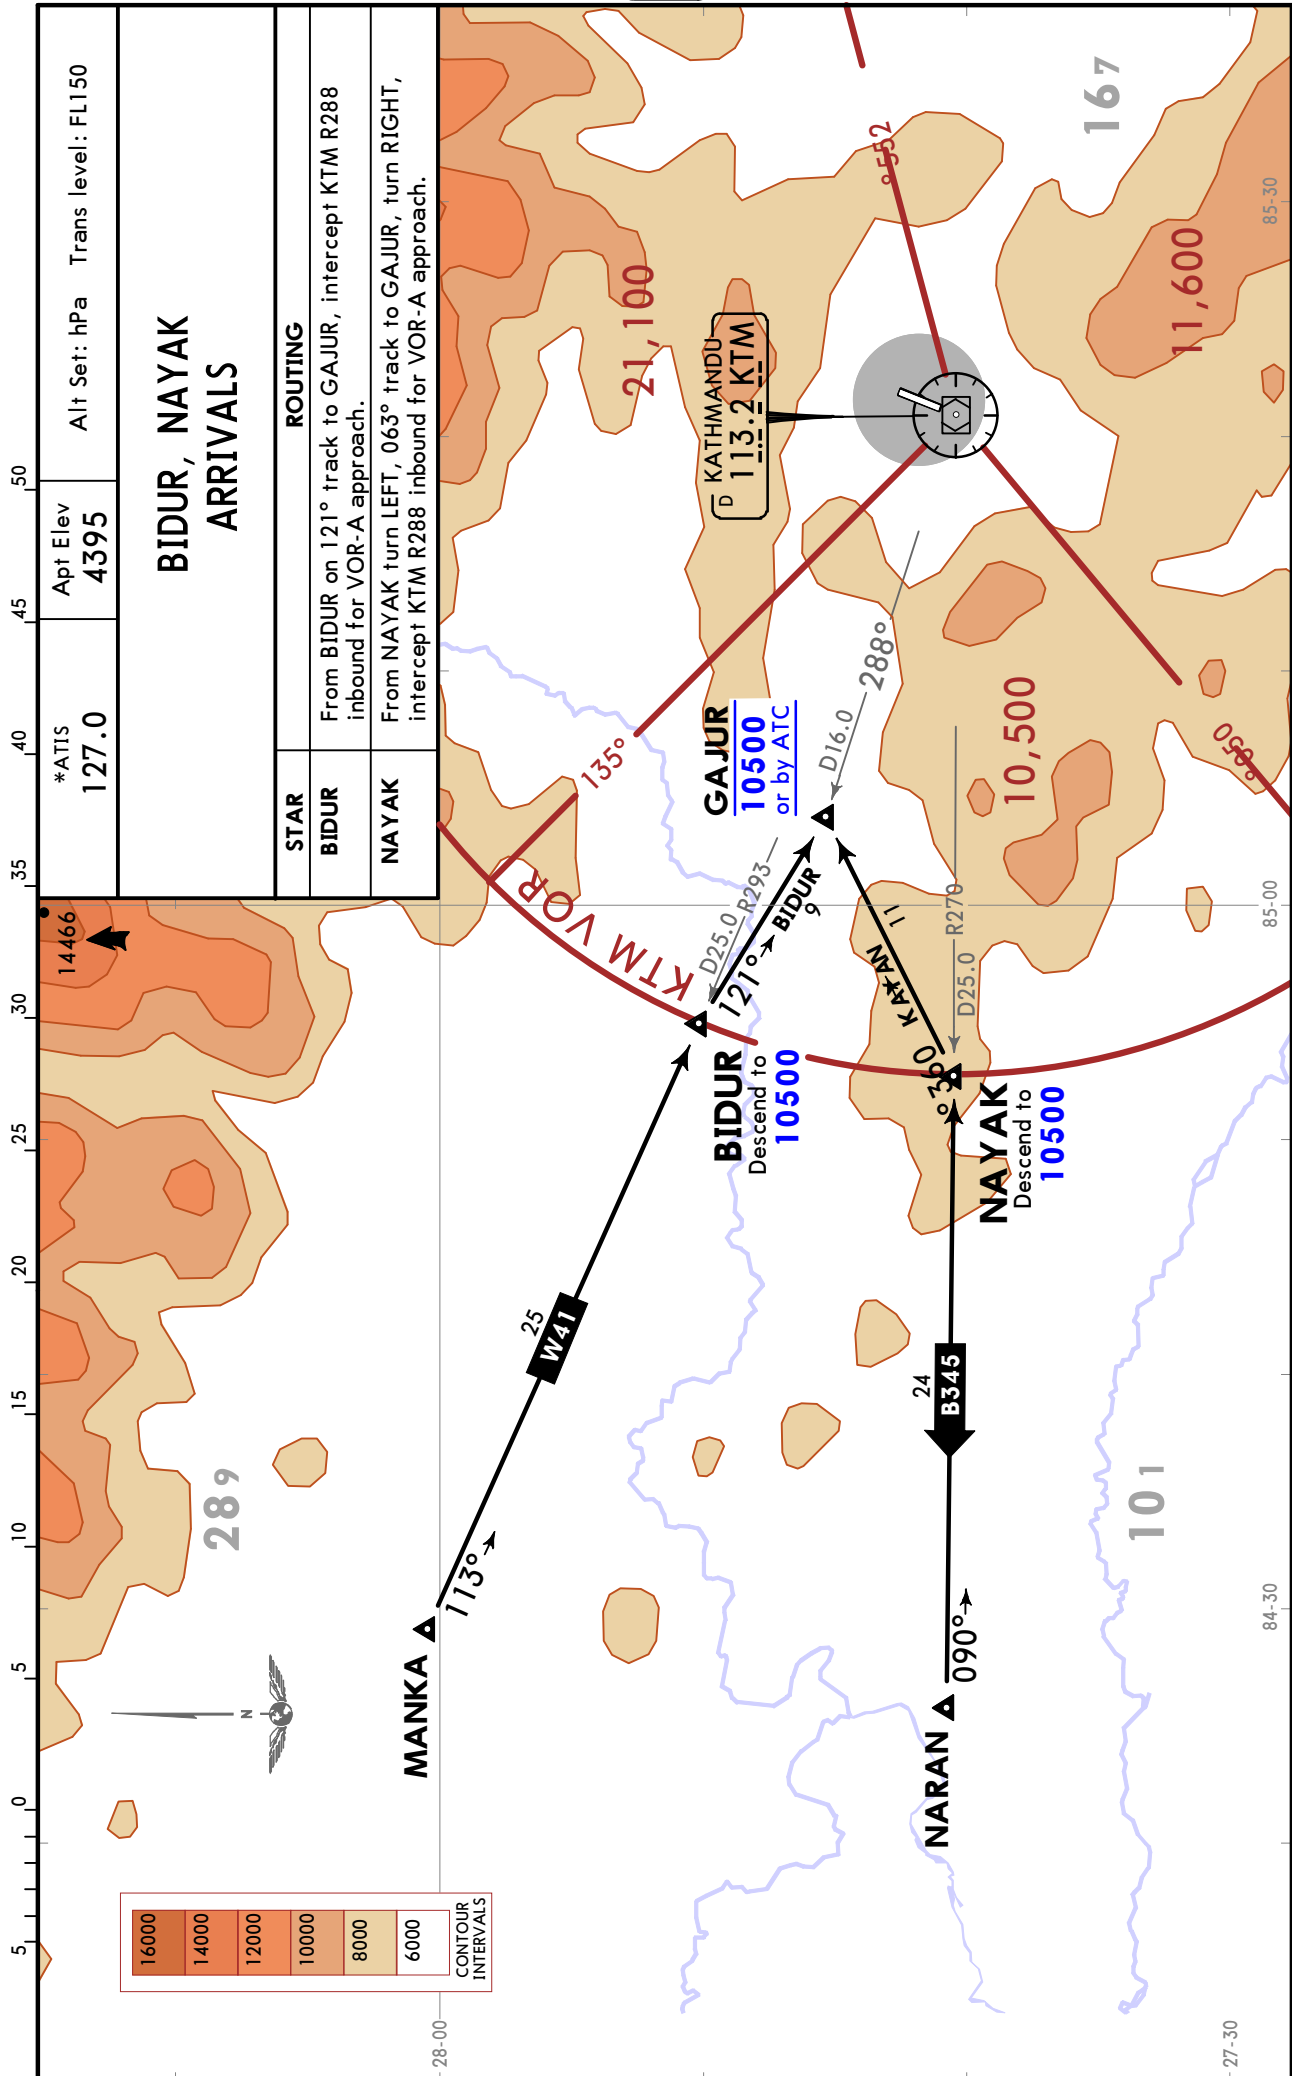Eff 19 May**STAR**

VNKT/KTM
TRIBHUVAN INTL

JEPPESEN

KATHMANDU, NEPAL

13 MAY 22

10-2G

Eff 19 May


STAR

*ATIS
127.0

Apt Elev
4395

Alt Set: hPa
Trans level: FL150

ROMEO, SIMARA [SMR]
ARRIVALS

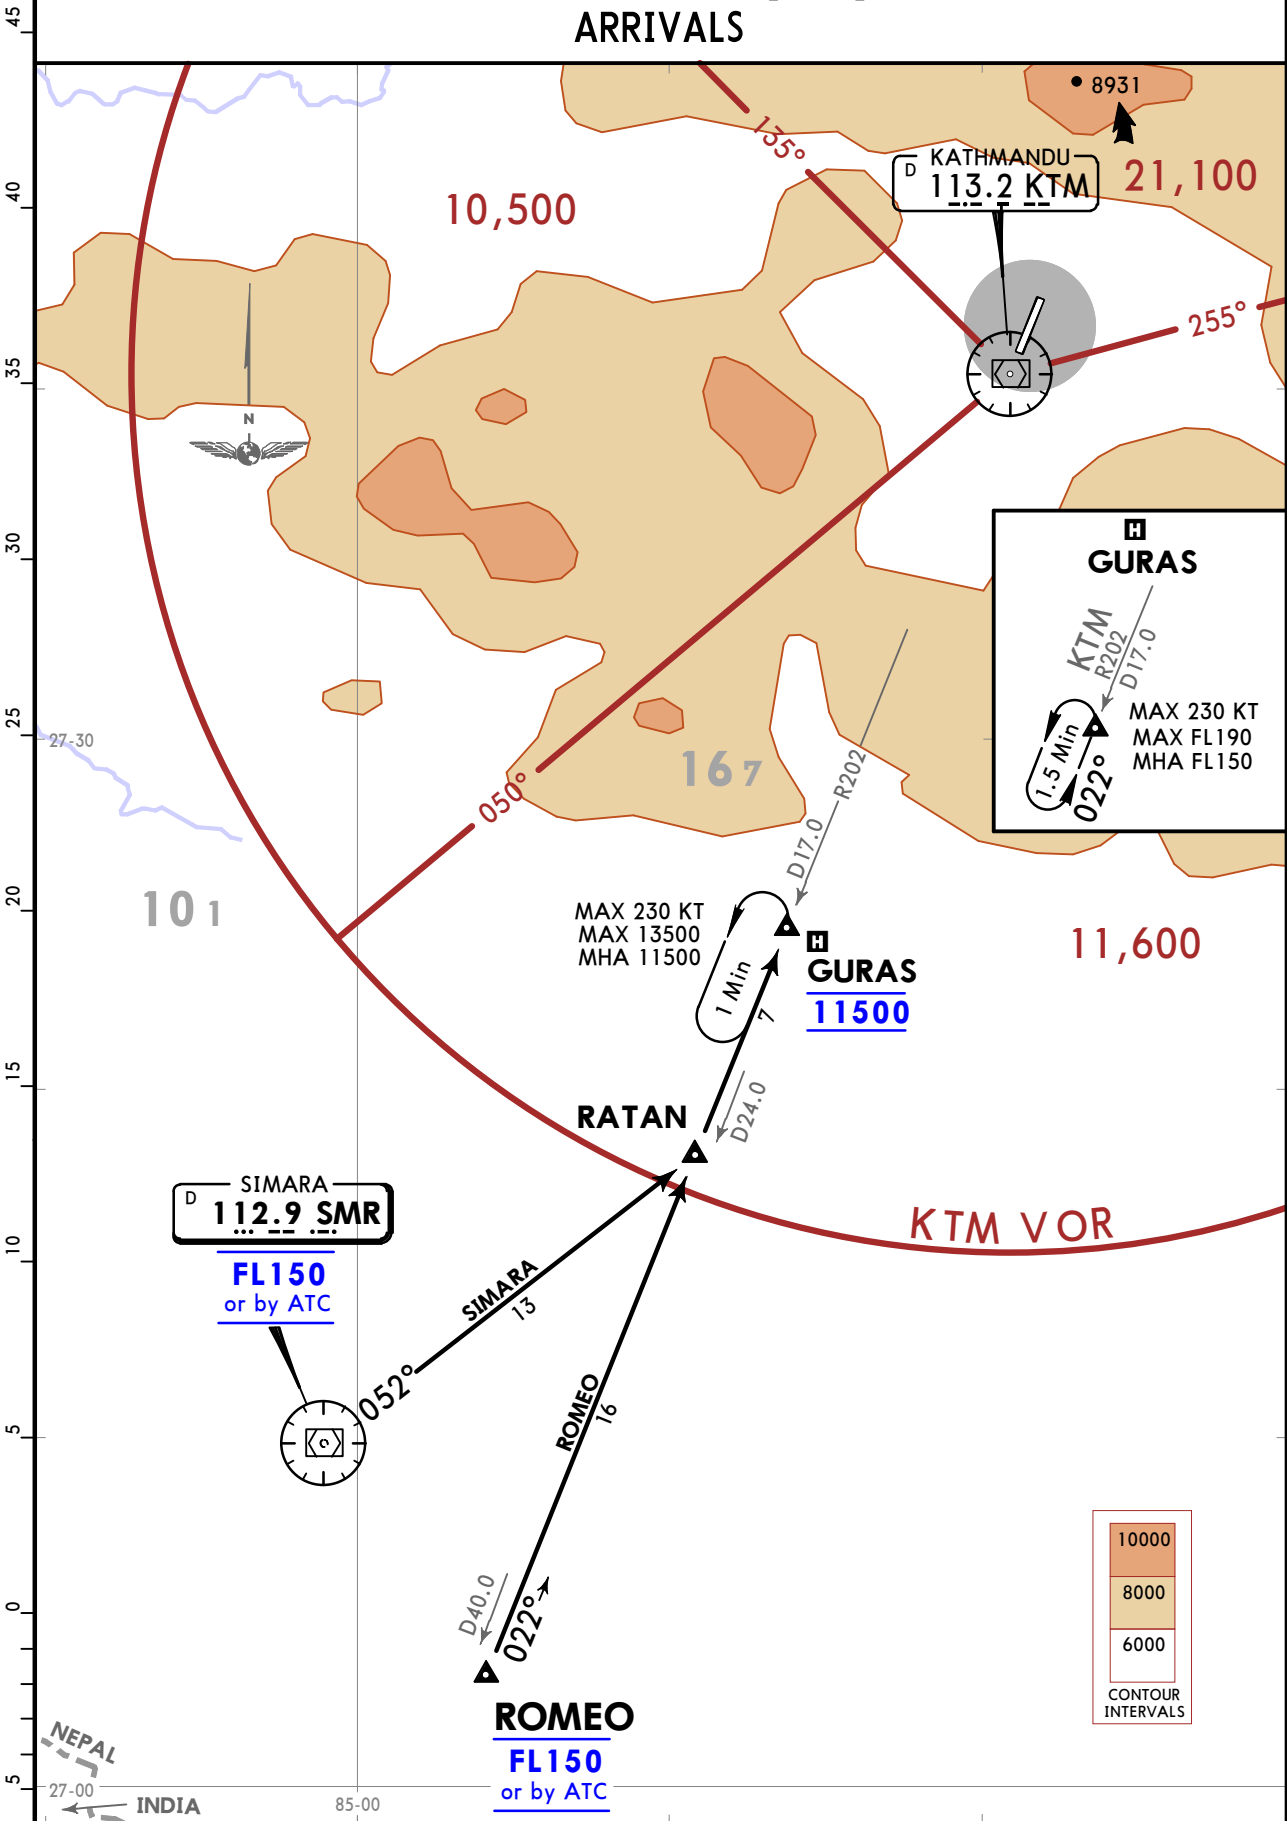

STAR	ROUTING
ROMEO	At ROMEO turn RIGHT, intercept KTM R202 inbound to RATAN, then to GURAS.
SIMARA	On SMR R052 to RATAN, intercept KTM R202 inbound to GURAS.



VNKT/KTM
TRIBHUVAN INTL

JEPPESEN KATHMANDU, NEPAL

13 MAY 22
10-3
RNP AR DEP
RF required
Authorization required

Trans alt: 13500
Appt Elev
4395

IGRIS 1C [IGR11C]
IGRIS 1D [IGR11D]
RNP DEPARTURES
(RWY 02)

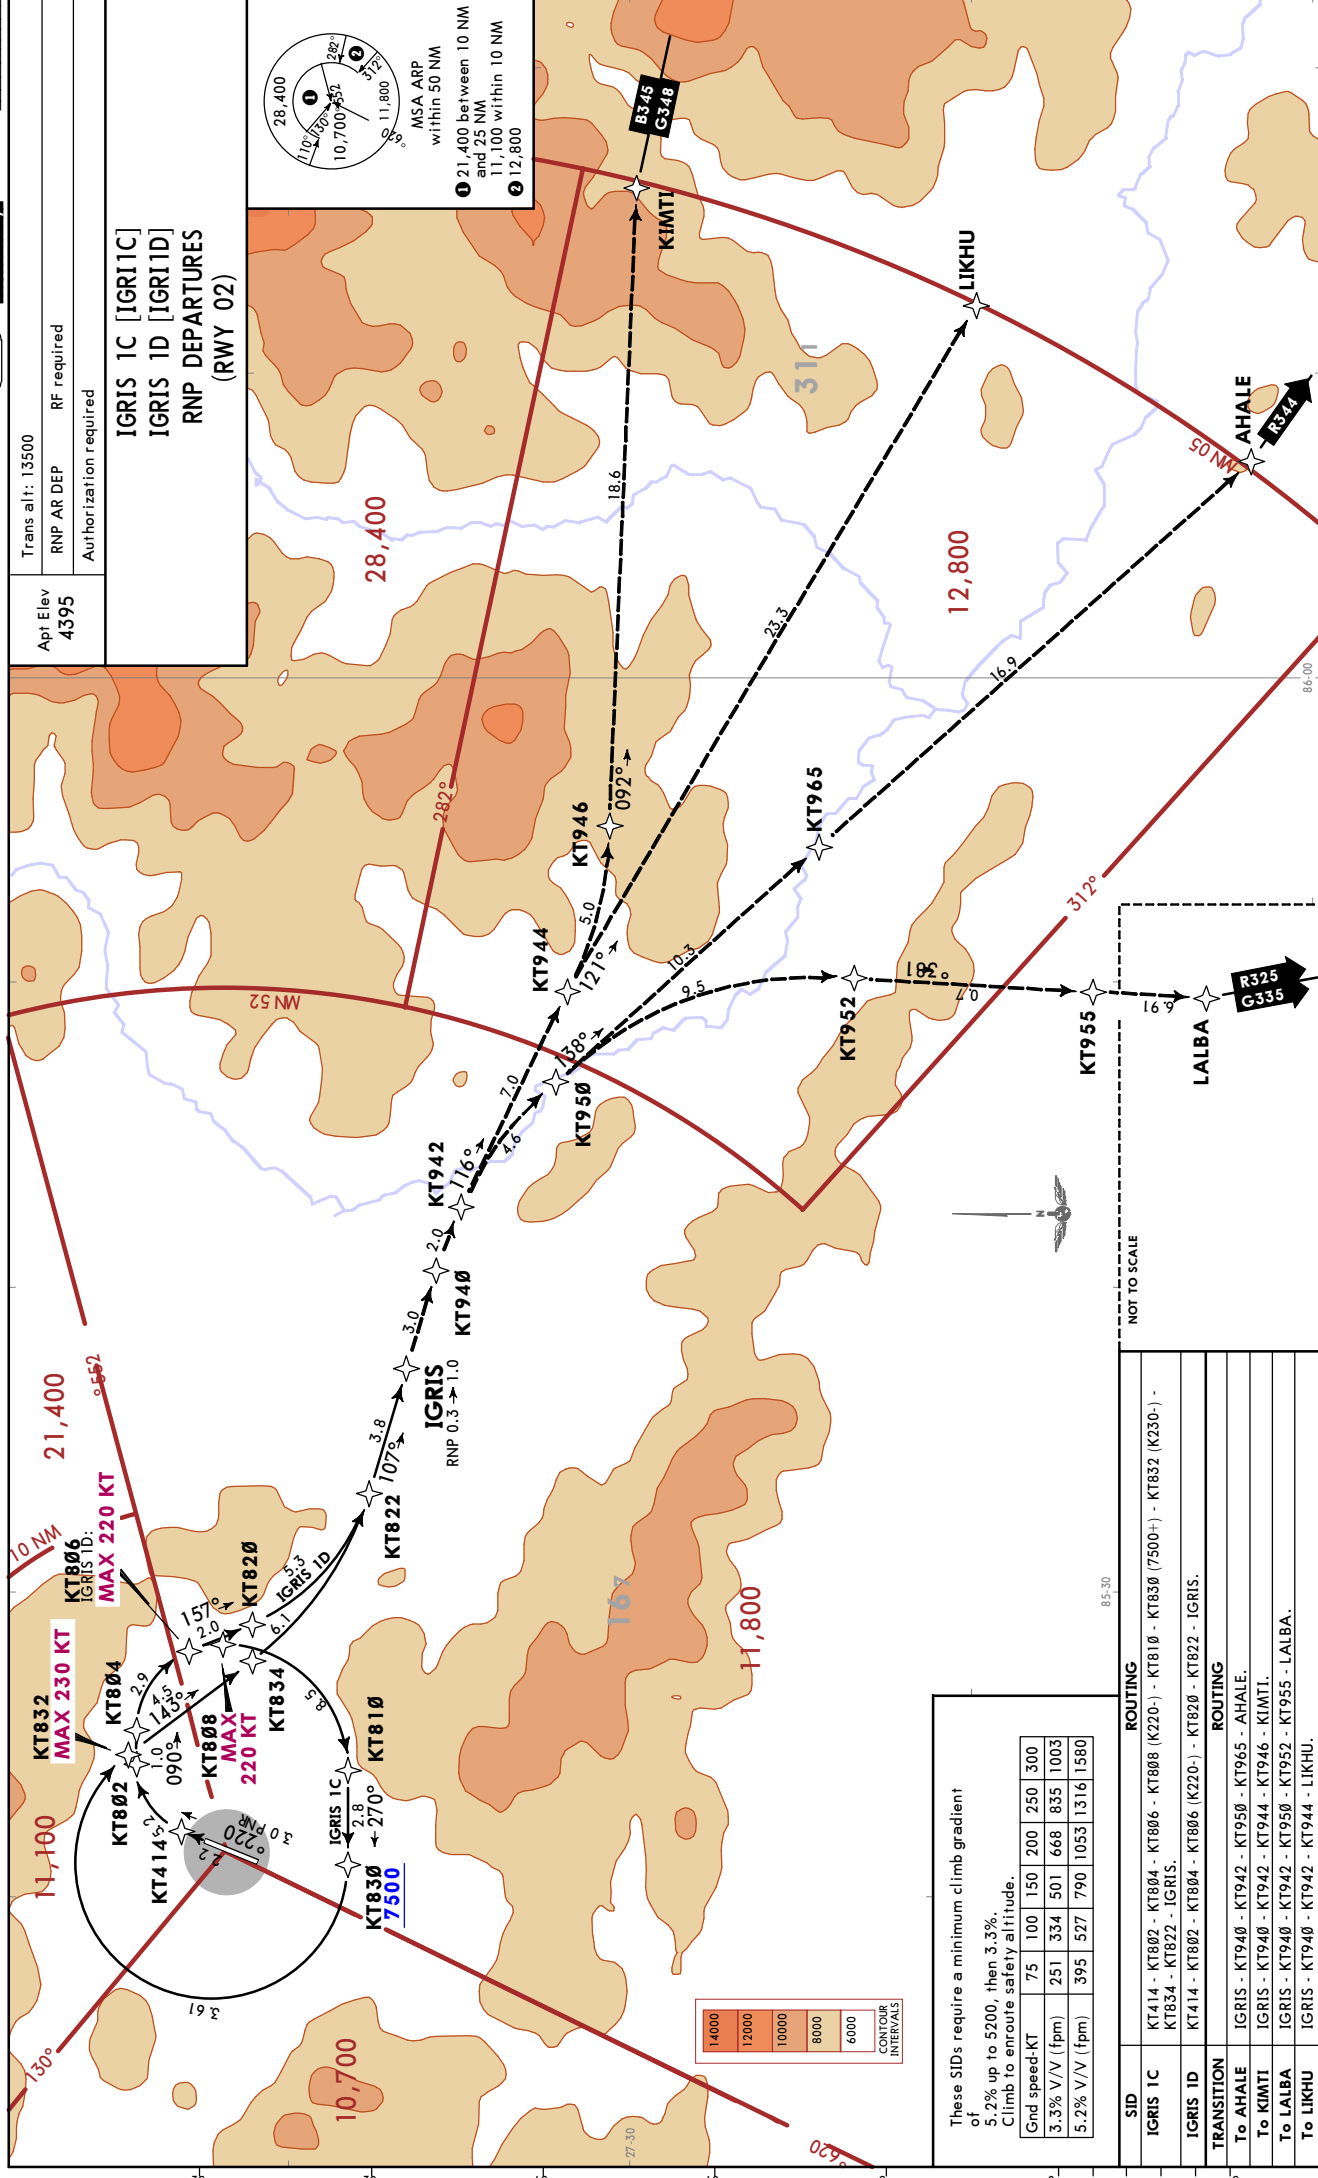

SID	ROUTING
IGRIS 1C	KT414 - KT802 - KT804 - KT806 - KT808 (K220) - KT810 - KT830 (7500+) - KT832 (K230) - KT834 - KT822 - IGRIS.
IGRIS 1D	KT414 - KT802 - KT804 - KT806 (K220) - KT820 - IGRIS.
TRANSITION	IGRIS - KT940 - KT942 - KT950 - KT965 - AHALE.
To KIMTI	IGRIS - KT940 - KT942 - KT944 - KT946 - KIMTI.
To LALBA	IGRIS - KT940 - KT942 - KT950 - KT952 - KT955 - LALBA.
To LIKHU	IGRIS - KT940 - KT942 - KT944 - LIKHU.

VNKT/KTM
TRIBHUVAN INTL

JEPPESEN KATHMANDU, NEPAL
13 MAY 22
(10-3B) EET 19 May

RNAV SID


Trans alt: 13500

Apt Elev
4395

RNP AR DEP
RF required

Authorization required

DARKE 1F [DARK1F]
RNP DEPARTURE
(RWY 02)

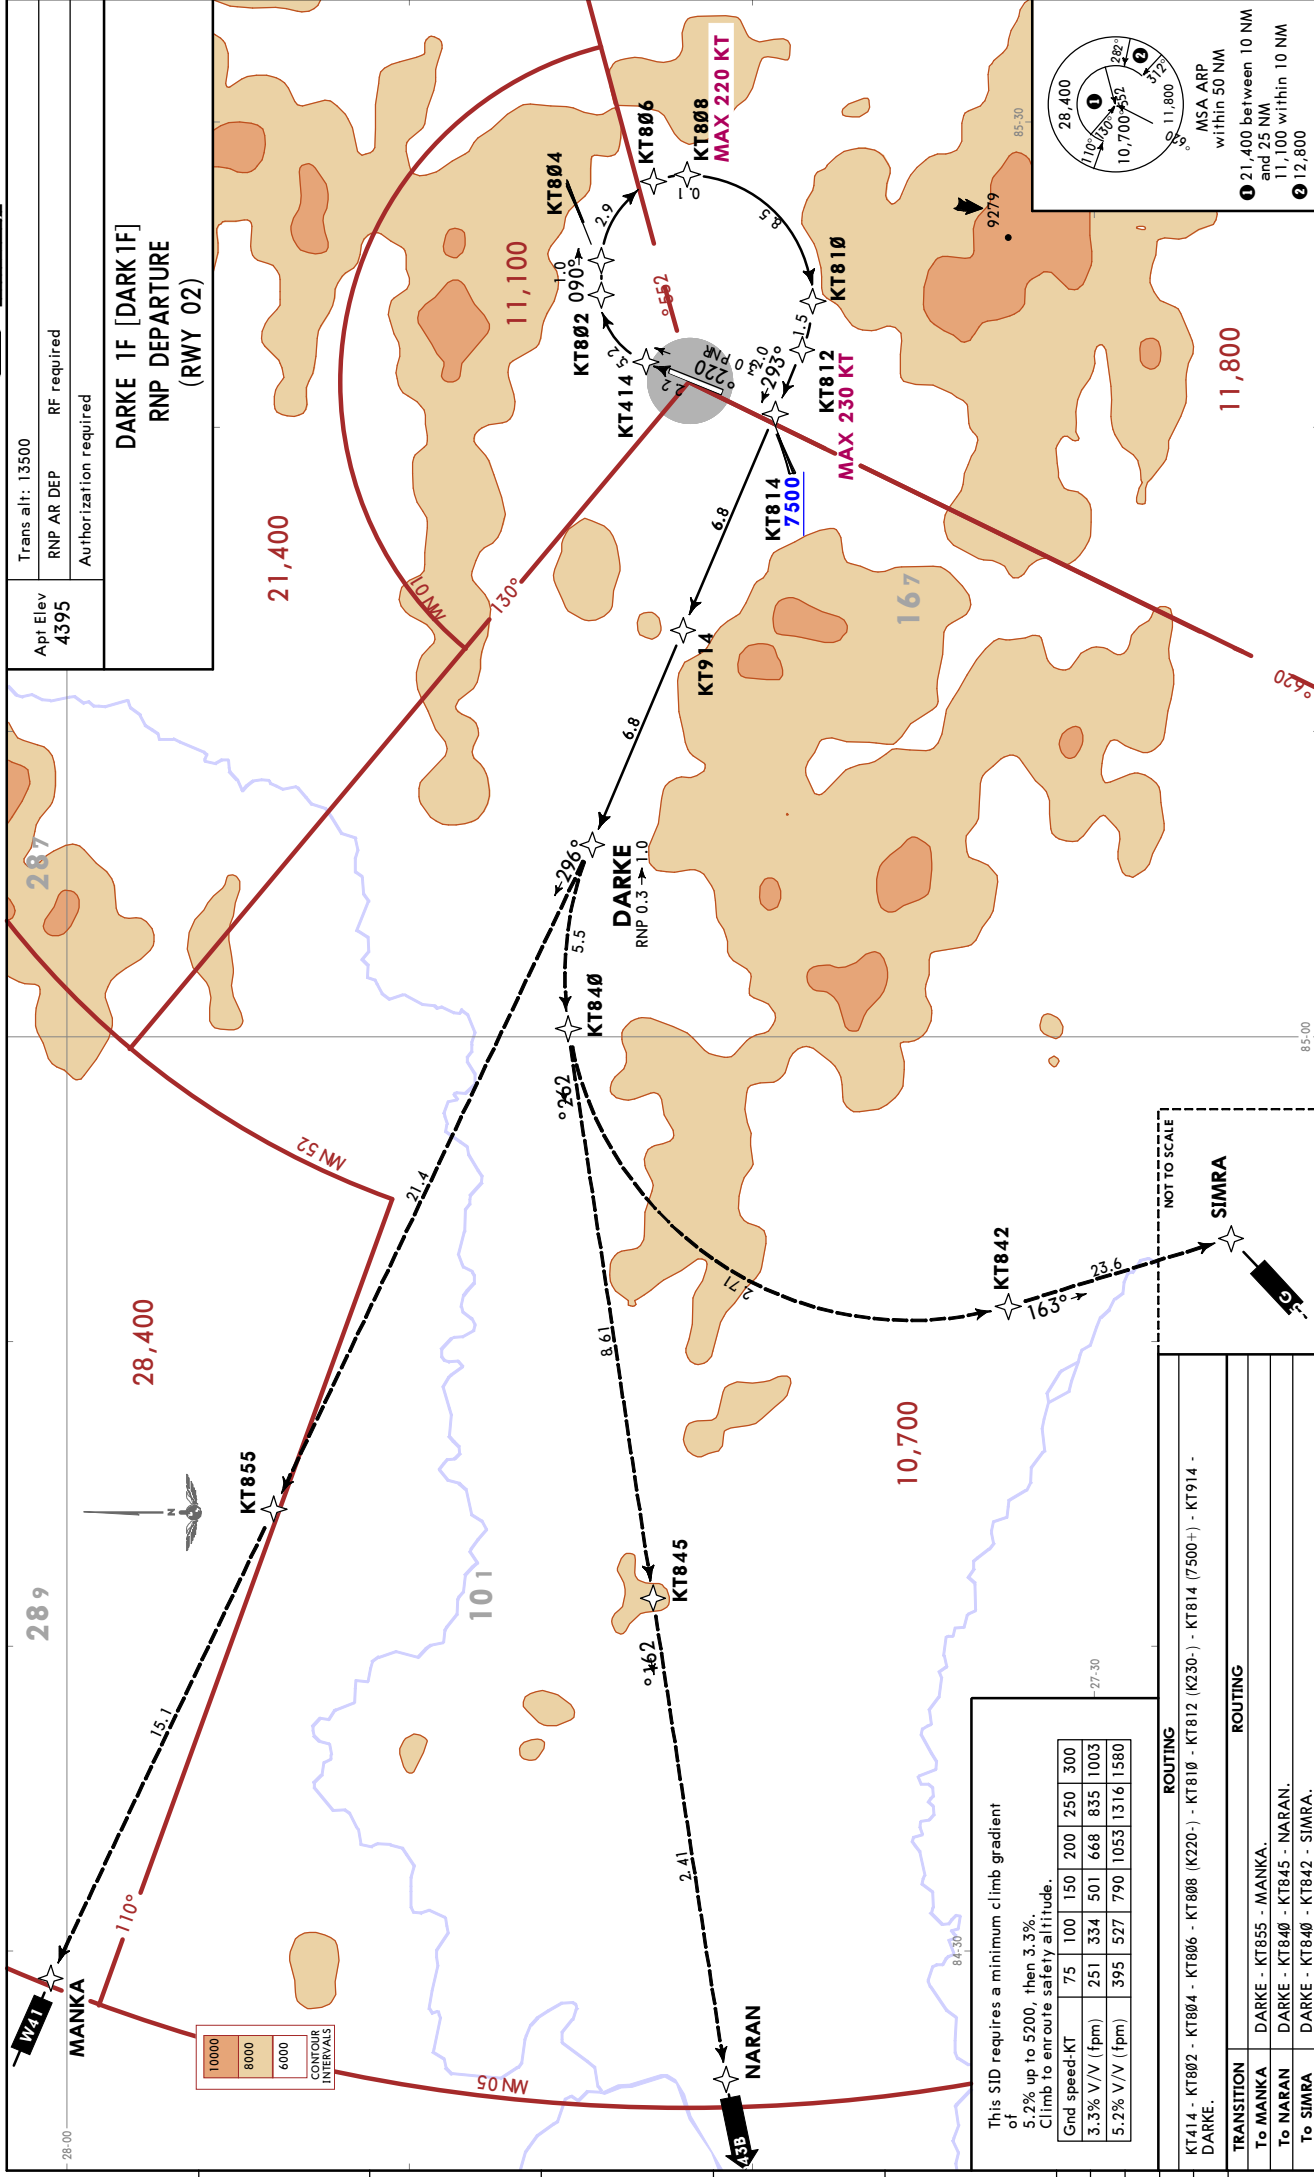

This SID requires a minimum climb gradient of 5.2% up to 5200, then 3.3%.
Climb to enroute safety altitude.

Grnd speed-KT	75	100	150	200	250	300
3.3% V/V (fpm)	251	334	501	668	835	1003
5.2% V/V (fpm)	395	527	790	1053	1316	1580

ROUTING

KT814 - KT802 - KT806 - KT808 (K220-) - KT810 - KT812 (K230-) - KT814 (7500+) - KT914 - DARKE.

ROUTING

TRANSITION	ROUTING
To MANKA	DARKE - KT855 - MANKA.
To NARAN	DARKE - KT840 - KT845 - NARAN.
To SIMRA	DARKE - KT840 - KT842 - SIMRA.



CHANGES: New procedures at this airport (procedures transferred).

VNKT/KTM
TRIBHUVAN INTL

JEPPESEN KATHMANDU, NEPAL
13 MAY 22
(10-3C) EET 19 May RNAV SID

Trans alt: 13500
Apt Elev 4395
RNP AR DEP RF required
1. EXPECT close-in obstacles.
2. Authorization required

DARKE 1G [DARK 1G]
DARKE 1H [DARK 1H]
RNP DEPARTURES
(RWY 20)

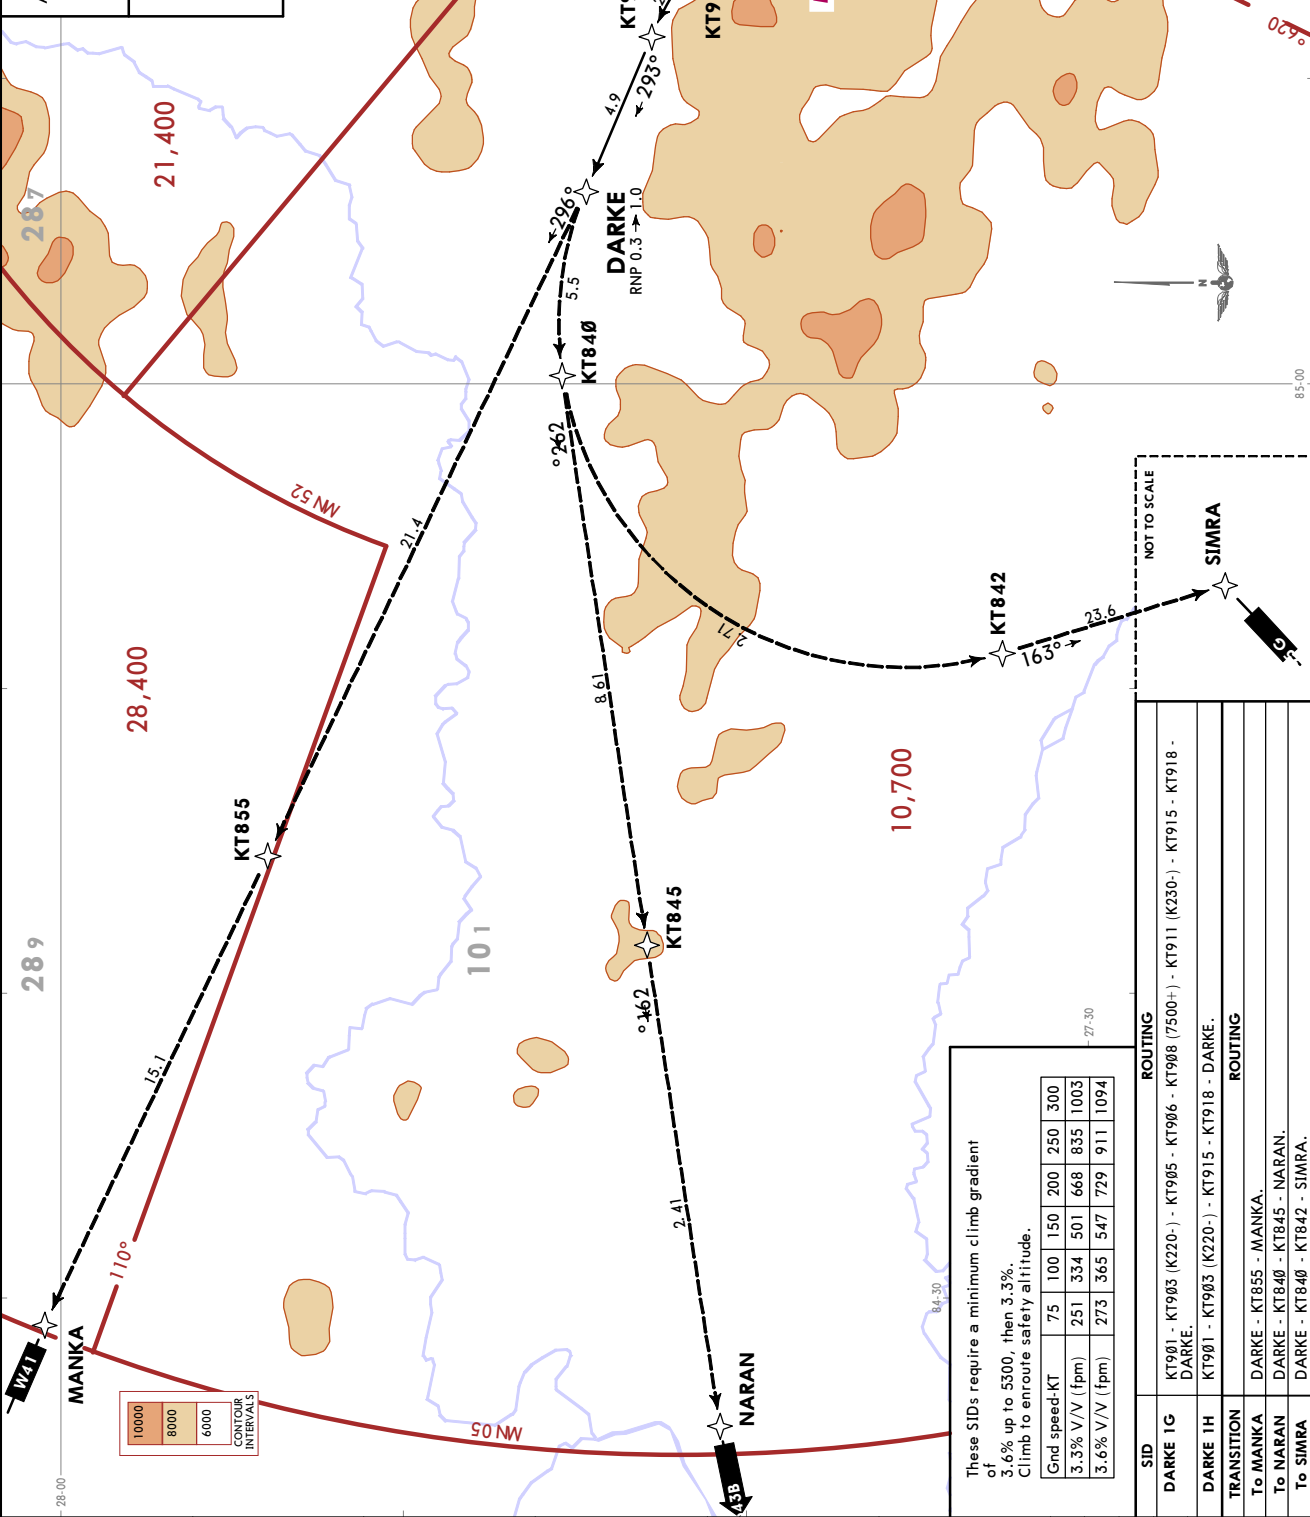

MSA ARP within 50 NM
1 21,400 between 10 NM and 25 NM
11,100 within 10 NM
2 12,800

These SIDs require a minimum climb gradient of 3.6% up to 5300, then 3.3%. Climb to enroute safety altitude.

Grnd speed-KT	75	100	150	200	250	300
3.3% V/V (fpm)	251	334	501	668	835	1003
3.6% V/V (fpm)	273	365	547	729	911	1094

SID	ROUTING
DARKE 1G	KT901 - KT903 (K220-) - KT905 - KT906 - KT908 (7500+) - KT911 (K230-) - KT915 - KT918 - DARKE.
DARKE 1H	KT901 - KT903 (K220-) - KT915 - KT918 - DARKE.
TRANSITION	DARKE - KT855 - MANKA.
To MANKA	DARKE - KT840 - KT845 - NARAN.
To NARAN	DARKE - KT840 - KT842 - SIMRA.


CHANGES: New procedures at this airport (procedures transferred).

VNKT/KTM
TRIBHUVAN INTL

KATHMANDU, NEPAL

13 MAY 22

10-3D

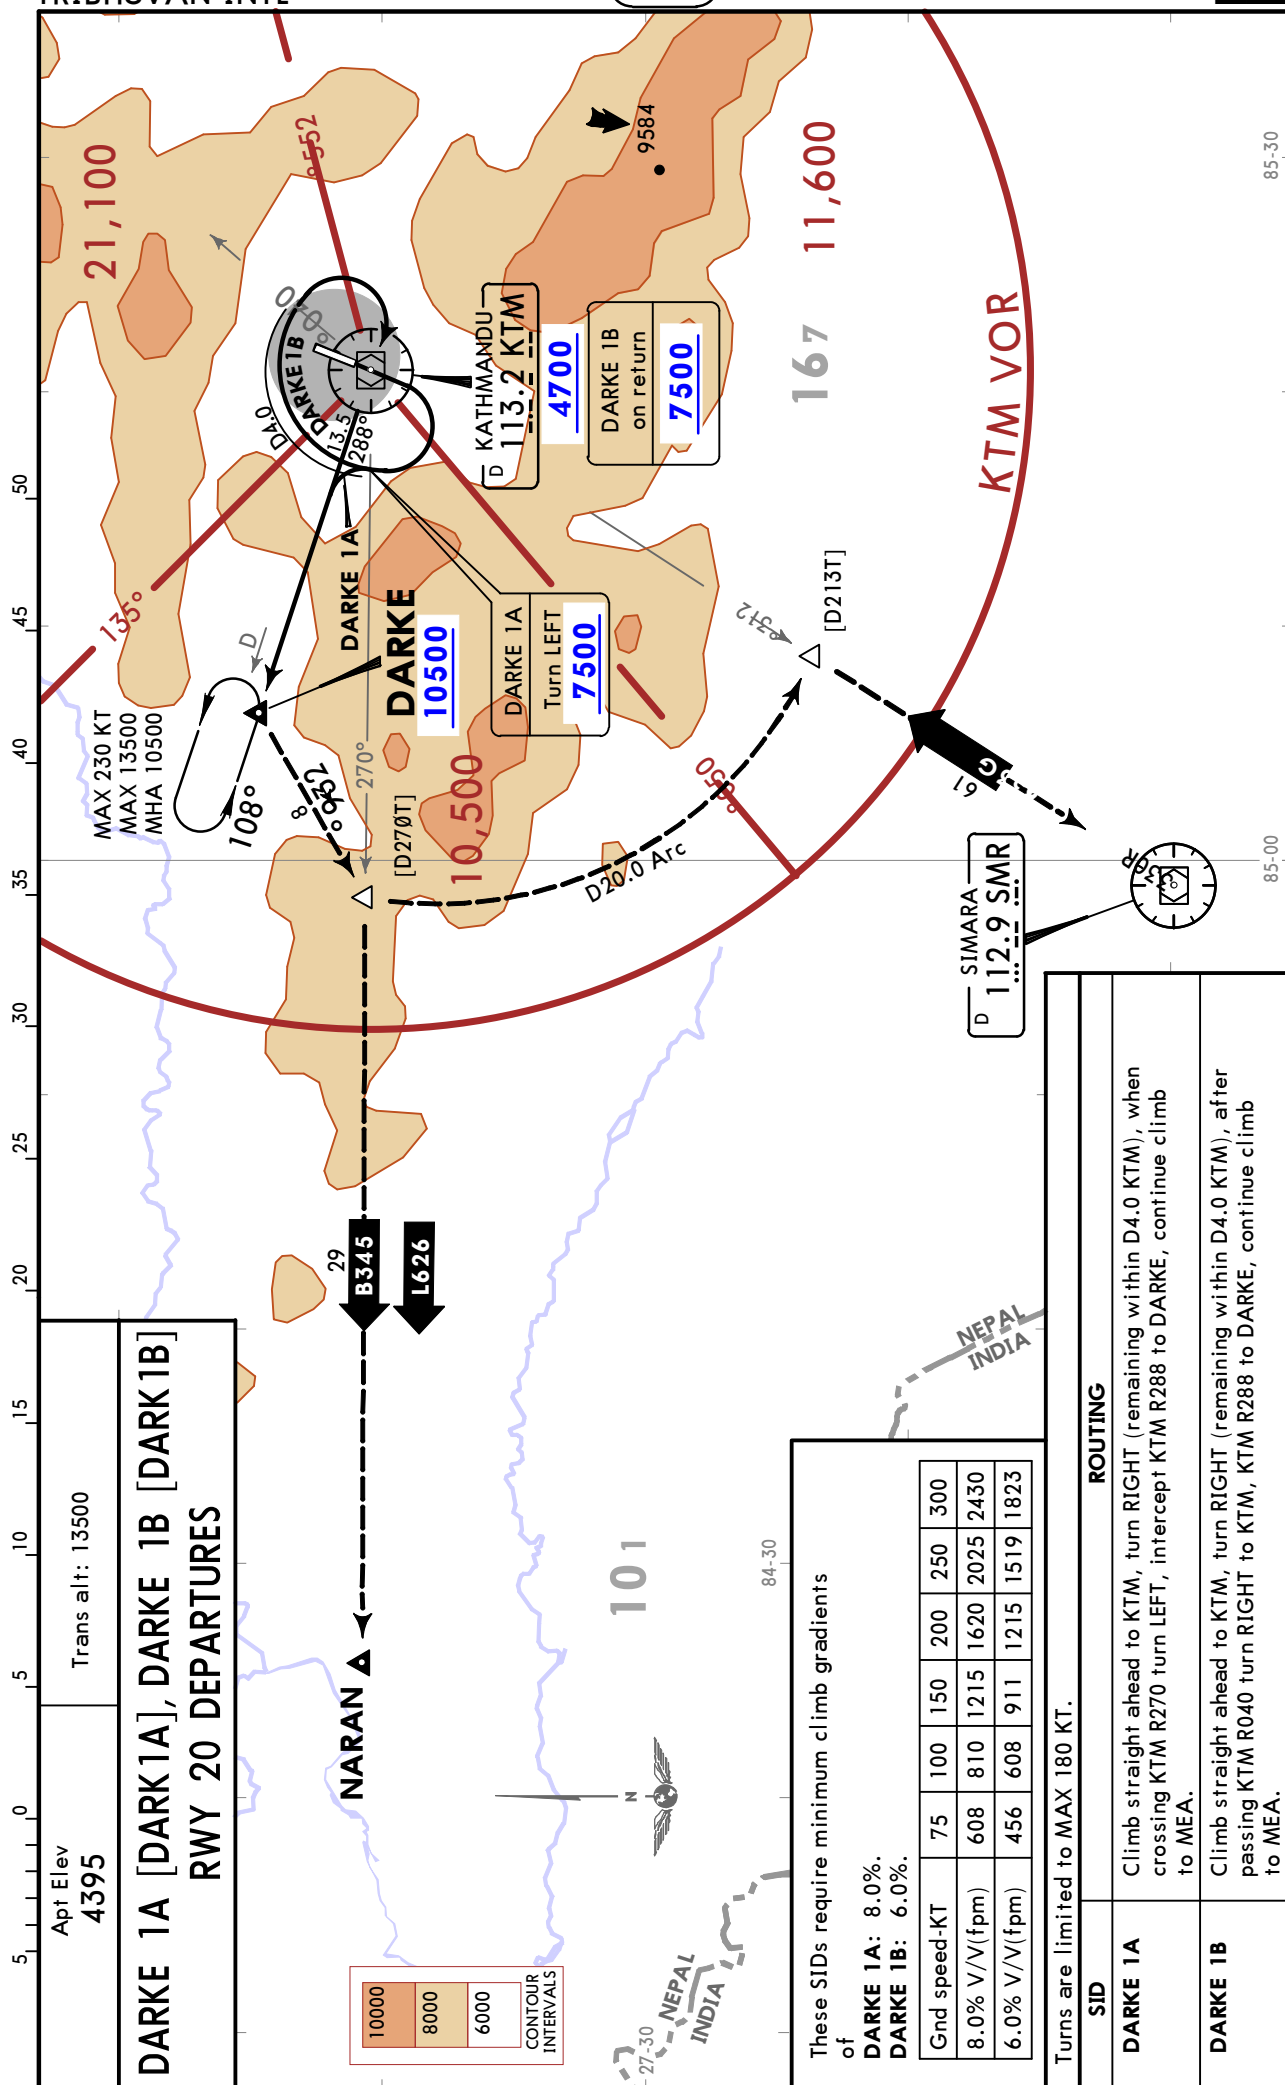Eff 19 May**SID**

**DARKE 1C [DARK1C], DARKE 1D [DARK1D]
RWY 02 DEPARTURES**

SID	ROUTING
DARKE 1C	Climb straight ahead to D2.5 KTM, turn RIGHT to KTM, KTM R288 to DARKE, continue climb to MEA.
DARKE 1D	Climb straight ahead to D3.0 KTM, turn LEFT, along D4.0 Arc KTM, when crossing KTM R310 turn RIGHT, intercept KTM R288 to DARKE, continue climb to MEA.

These SIDs require a minimum climb gradient of 6.0%.

Gnd speed-KT	75	100	150	200	250	300
6.0% V/V(fpm)	456	608	911	1215	1519	1823

Turns are limited to MAX 180 KT.

Chart Details:
 Apt Elev 4395
 Trans alt: 13500
 Contour Intervals: 10000, 8000, 6000
 Navigation Aids: KATHMANDU 113.2 KTM, SIMARA 112.9 SMR, KTM VOR 167
 Obstacles: 9584, 21100, 11600, 10500
 Airways: B345, L626, NARAN Δ
 Climb Gradients: 6.0%, 10.8%, 13.5%, 13.5%, 13.5%, 13.5%, 13.5%, 13.5%



VNKT/KTM

JEPPESSEN

8 AUG 25 (10-8)

KATHMANDU, NEPAL

TRIBHUVAN INTL

CONSTRUCTION WORKS

REFER ALSO TO LATEST NOTAMS

1. Reduced Operation Hours

- Airport operating hours daily: 0015Z - 1915Z
- Construction activities outside the Obstacle Free Zone (OFZ) and outside of Movement Area will be continued daily H24. Pilots shall take caution during landing, take-off and taxiing.

2. Construction Works


- Extension of Parallel TWY to connect RWY 02 and associated works:
Construction works for Parallel TWY are in progress beyond 246'(75m) from runway centerline at West of RWY 02/20 and South of TWY E towards RWY 02.
- Hanger area development at East side of RWY 02/20 and associated works:
Construction works for Hangar Apron and taxiways are in progress beyond 246'(75m) from runway centerline at East of RWY 02/20 towards North of ARFF Station.

3. Closure of parallel TWY segments 1 DEC 25 - 31 MAR 26

- The existing TWY E and part of the existing parallel TWY F between existing TWY D and existing TWY E will be completely closed to allow improvement of intersection among the existing TWY E, existing parallel TWY F and new parallel TWY P towards RWY 02.

LEGEND

- Rwy guard lights
- Construction work
- ▨ TWY P construction work during APT closure 01 DEC 25 - 31 MAR 26

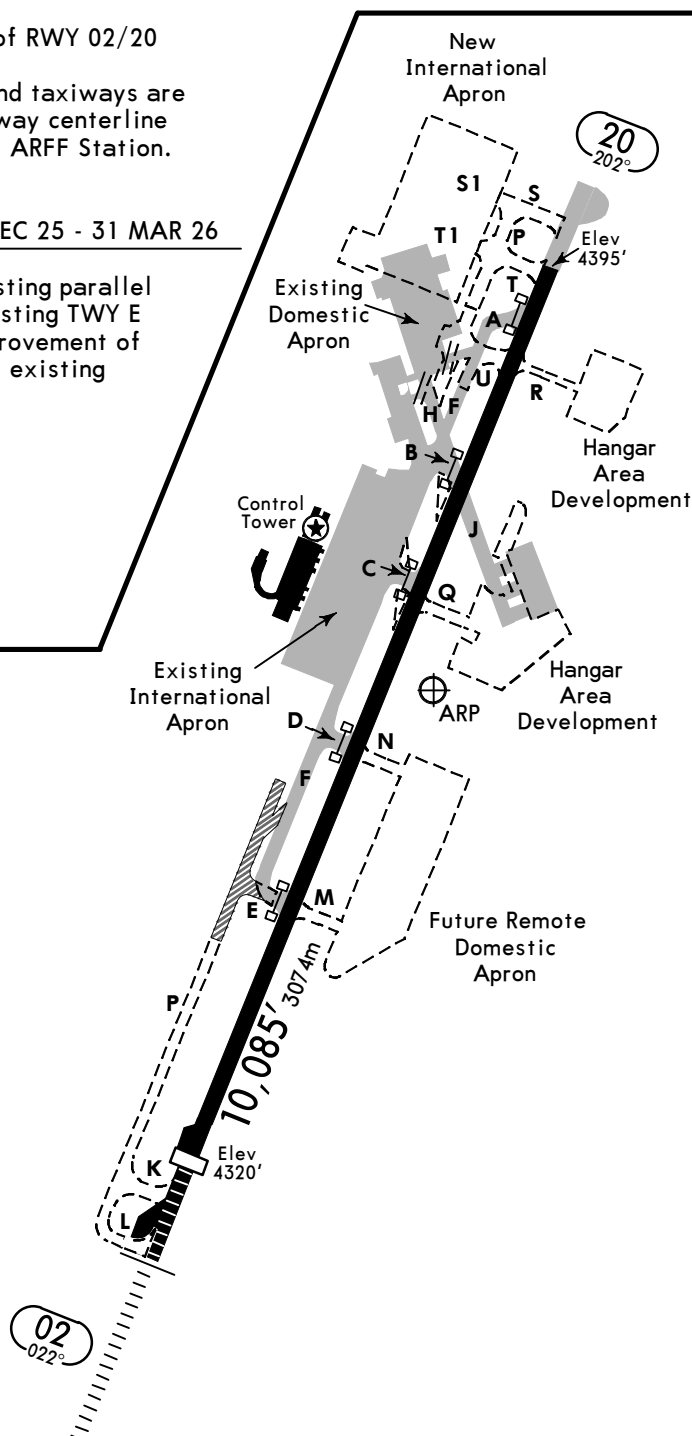

VNKT/KTM


 **JEPPESSEN**
21 FEB 25 **10-8A**

KATHMANDU, NEPAL
TRIBHUVAN INTL

CONSTRUCTION WORKS ON LINK G
REFER ALSO TO LATEST NOTAMS

Existing Link G and some part of domestic parking apron adjacent to it will be completely demolished for construction of new parallel TWY P.
During construction period, new alternative Link G will be provided.

- Existing Link G will be permanently demolished.
- New temporary alternative Link G will be provided with taxiway marking and retroreflective blue taxiway edge markers.
- Stands D1 and D2 will not be available.

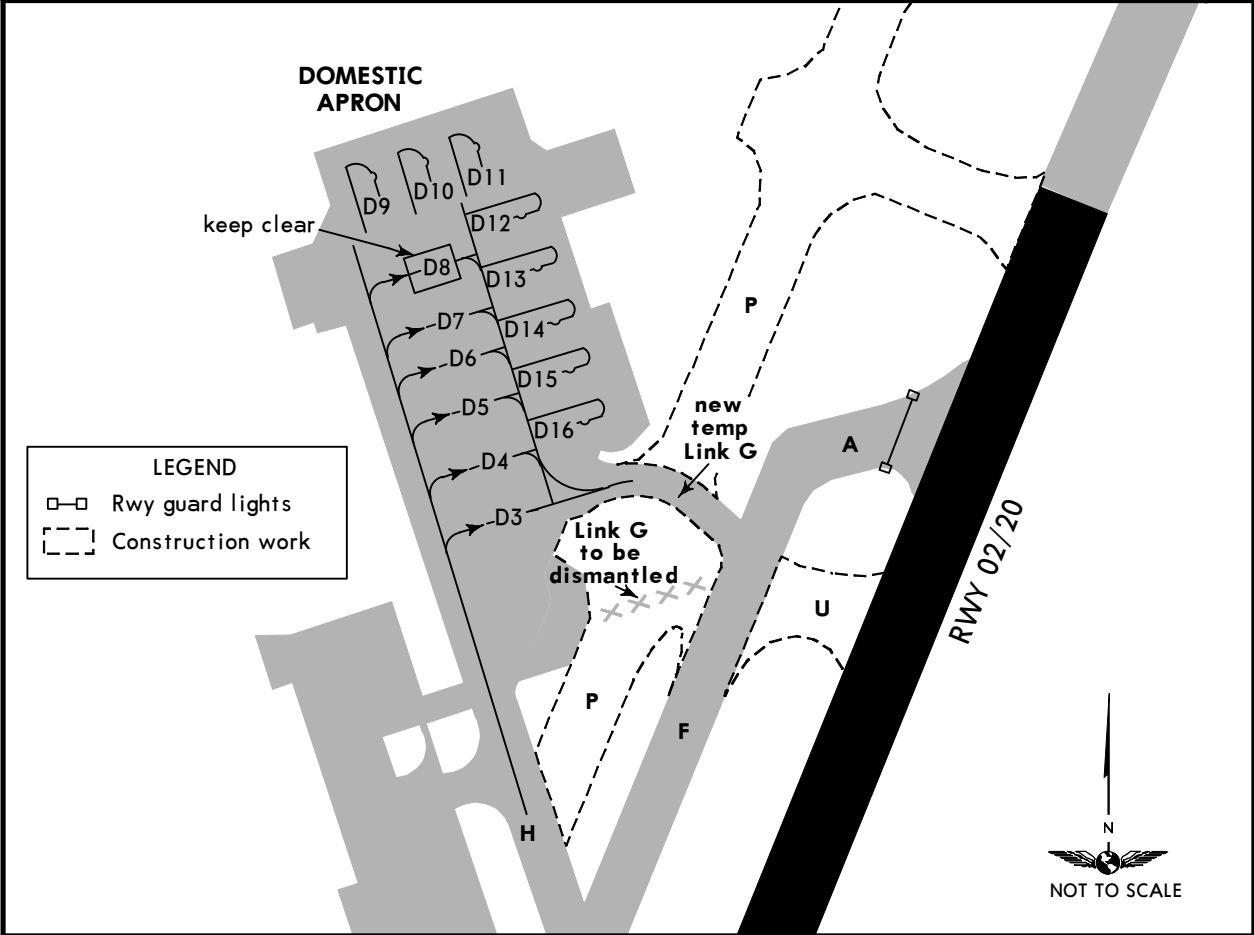

VNKT/KTM


Apt Elev **4395'**
N27 41.8 E085 21.6

JEPPESSEN

8 AUG 25 **(10-9)**

KATHMANDU, NEPAL

TRIBHUVAN INTL

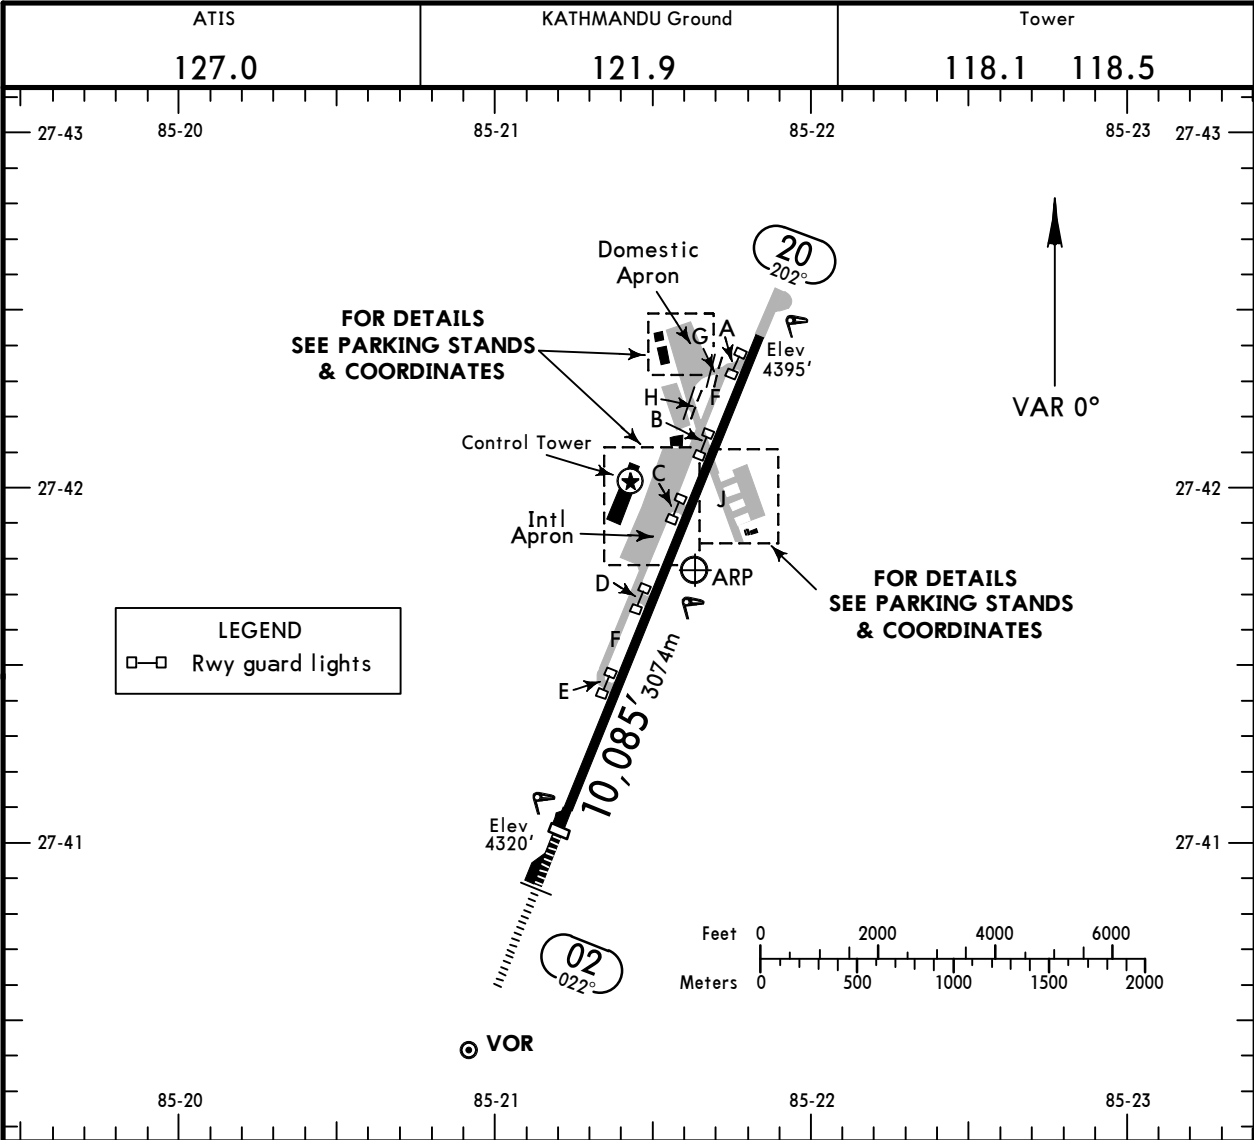

ADDITIONAL RUNWAY INFORMATION					
RWY		USABLE LENGTHS			
		LANDING BEYOND		TAKE-OFF	WIDTH
		Threshold	Glide Slope		
02	① HIRL (60m) ① CL (30m) ② PALS CAT I (LIH) SFL PAPI-L (angle 3.0°, MEHT 65')	9101' 2774m			148' 45m
20	① HIRL (60m) ① CL (30m) REIL ③ PAPI-L (angle 3.0°, MEHT 65')				

- ① LED lights
- ② length 870m
- ③ PAPI restricted to be usable within 3 NM from rwy thresh with clearly visible.

State		TAKE-OFF	
		JET	TURBO PROP
2 Eng	V800m	1 & 2 Eng	V1600m
3 & 4 Eng		3 & 4 Eng	V800m

VNKT/KTM



JEPPESSEN

KATHMANDU, NEPAL


8 AUG 25

10-9A

TRIBHUVAN INTL

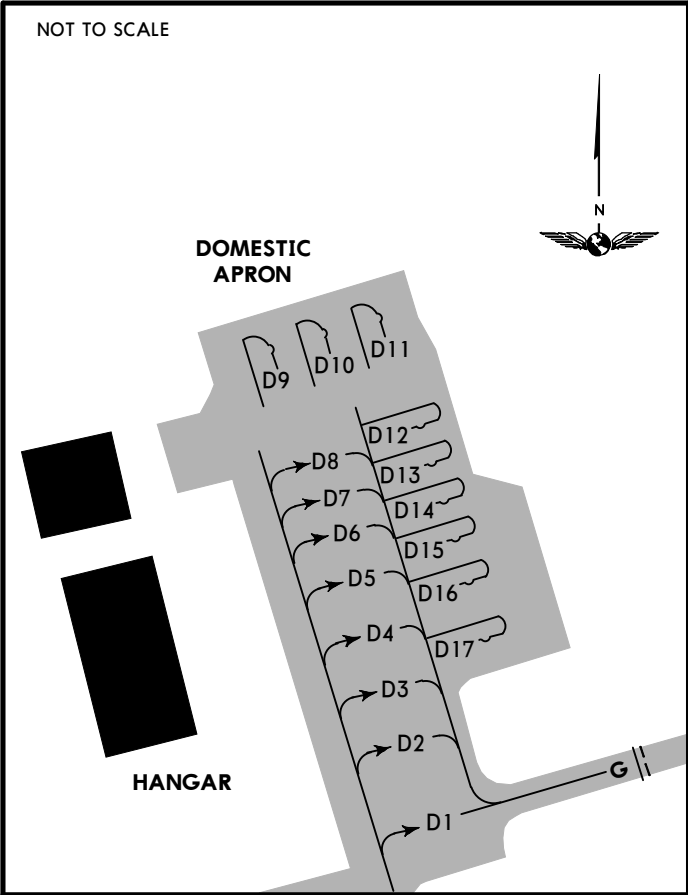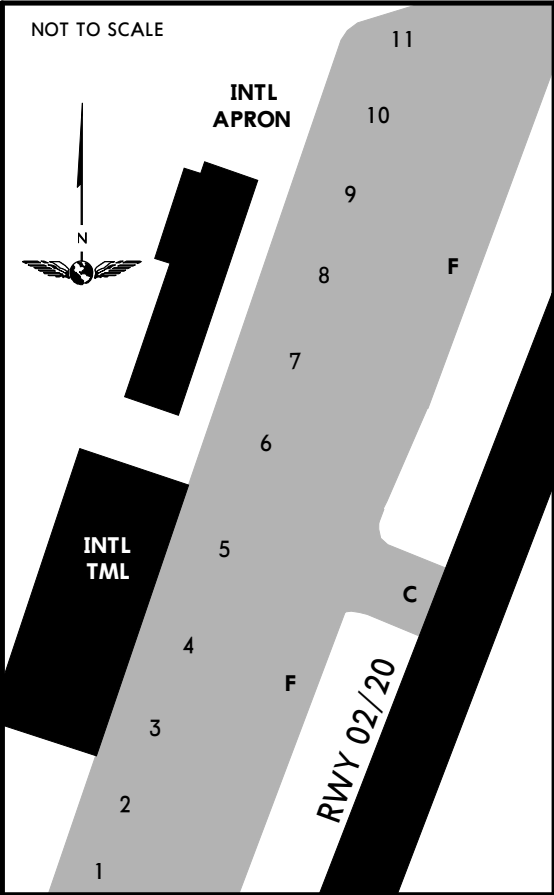

INS COORDINATES			
STAND No.	COORDINATES		ELEV
1	N27 41.8	E085 21.4	4371
2	N27 41.9	E085 21.4	4374
3	N27 41.9	E085 21.4	4377
4	N27 41.9	E085 21.5	4380
5	N27 42.0	E085 21.5	4382
6	N27 42.0	E085 21.5	4383
7	N27 42.0	E085 21.5	4384
8	N27 42.0	E085 21.5	4385
9	N27 42.1	E085 21.5	4385
10	N27 42.1	E085 21.6	4385
11	N27 42.1	E085 21.6	4386
R1	N27 41.9	E085 21.8	4380
R2, R3	N27 42.0	E085 21.8	4381
R4	N27 42.0	E085 21.8	4382

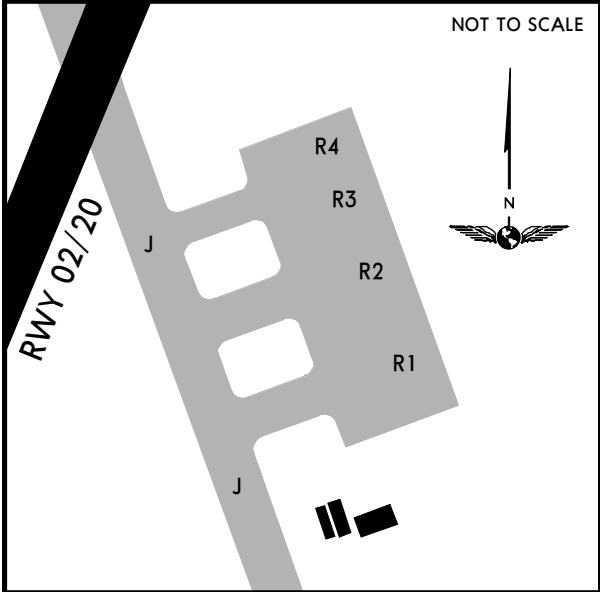

VNKT/KTM



EASA AIR OPS
KATHMANDU, NEPAL
TRIBHUVAN INTL

STRAIGHT-IN RWY		A	B	C	D
02	①② LOC	4860'(540') R/V1800m	4860'(540') R/V1800m	4860'(540') R/V2000m	4860'(540') R/V2000m
	ALS out	R/V2600m	R/V2600m	R/V2800m	R/V2800m
	RNP (AR) Z	4620'(300') R/V1100m	4620'(300') R/V1100m	4620'(300') R/V1100m	4620'(300') R/V1100m
	RNP 0.30 ALS out	R/V2000m	R/V2000m	R/V2000m	R/V2000m
	RNP (AR) Y	4620'(300') R/V2000m	4620'(300') R/V2000m	4620'(300') R/V2000m	4620'(300') R/V2000m
	RNP 0.30 ALS out	R/V2000m	R/V2000m	R/V2000m	R/V2000m
	②③ VOR	4950'(630') R/V1600m	4950'(630') R/V1600m	4950'(630') R/V2800m	4950'(630') R/V3200m
	ALS out	R/V2400m	R/V2400m	R/V3600m	R/V4000m
20	RNP (AR)	4685'(290') R/V3500m	4695'(300') R/V3500m	4705'(310') R/V3500m	4715'(320') R/V3500m
	RNP 0.30	R/V3500m	R/V3500m	R/V3500m	R/V3500m
	ALS out	R/V3500m	R/V3500m	R/V3500m	R/V3500m

- ① Continuous Descent Final Approach beginning at D5.5.
- ② Missed apch climb grad MIN 5.0%(304'/NM).
- ③ Continuous Descent Final Approach beginning at D3.0.

CIRCLE-TO-LAND		100 KT	135 KT	180 KT	D
after LOC RWY 02	DAY	4860'(465') V2600m	5470'(1075') V4600m	NOT AUTH	NOT AUTH
after LOC RWY 02	NIGHT	NOT AUTH	NOT AUTH	NOT AUTH	NOT AUTH
after VOR RWY 02 ④	DAY	4950'(630') V2400m	4950'(630') V2400m	NOT AUTH	NOT AUTH
after VOR RWY 02 ④	NIGHT	NOT AUTH	NOT AUTH	NOT AUTH	NOT AUTH
VOR-A ④	DAY ⑤	5600'(1280') V3700m	5600'(1280') V3700m	NOT AUTH	NOT AUTH
VOR-A ④	NIGHT ⑤ ⑥	5600'(1280') V5000m	5600'(1280') V5000m	NOT AUTH	NOT AUTH
VOR-B ④	DAY	5600'(1280') V3700m	5600'(1280') V3700m	NOT AUTH	NOT AUTH
VOR-B ④	NIGHT ⑥	5600'(1280') V5000m	5600'(1280') V5000m	NOT AUTH	NOT AUTH


- ④ Circling height based on RWY 02 displ thresh elev of 4320'.
- ⑤ Missed apch climb grad MIN 5.8%(353'/NM).
- ⑥ RWY 20: NOT AUTH.

TAKE-OFF			
JET		TURBO PROP	
2 Eng	V800m	1 & 2 Eng	V1600m
3 & 4 Eng		3 & 4 Eng	V800m

VNKT/KTM
TRIBHUVAN INTL

JEPPESSEN
14 APR 23 (11-1) Eff 20 Apr

KATHMANDU, NEPAL
LOC Rwy 02

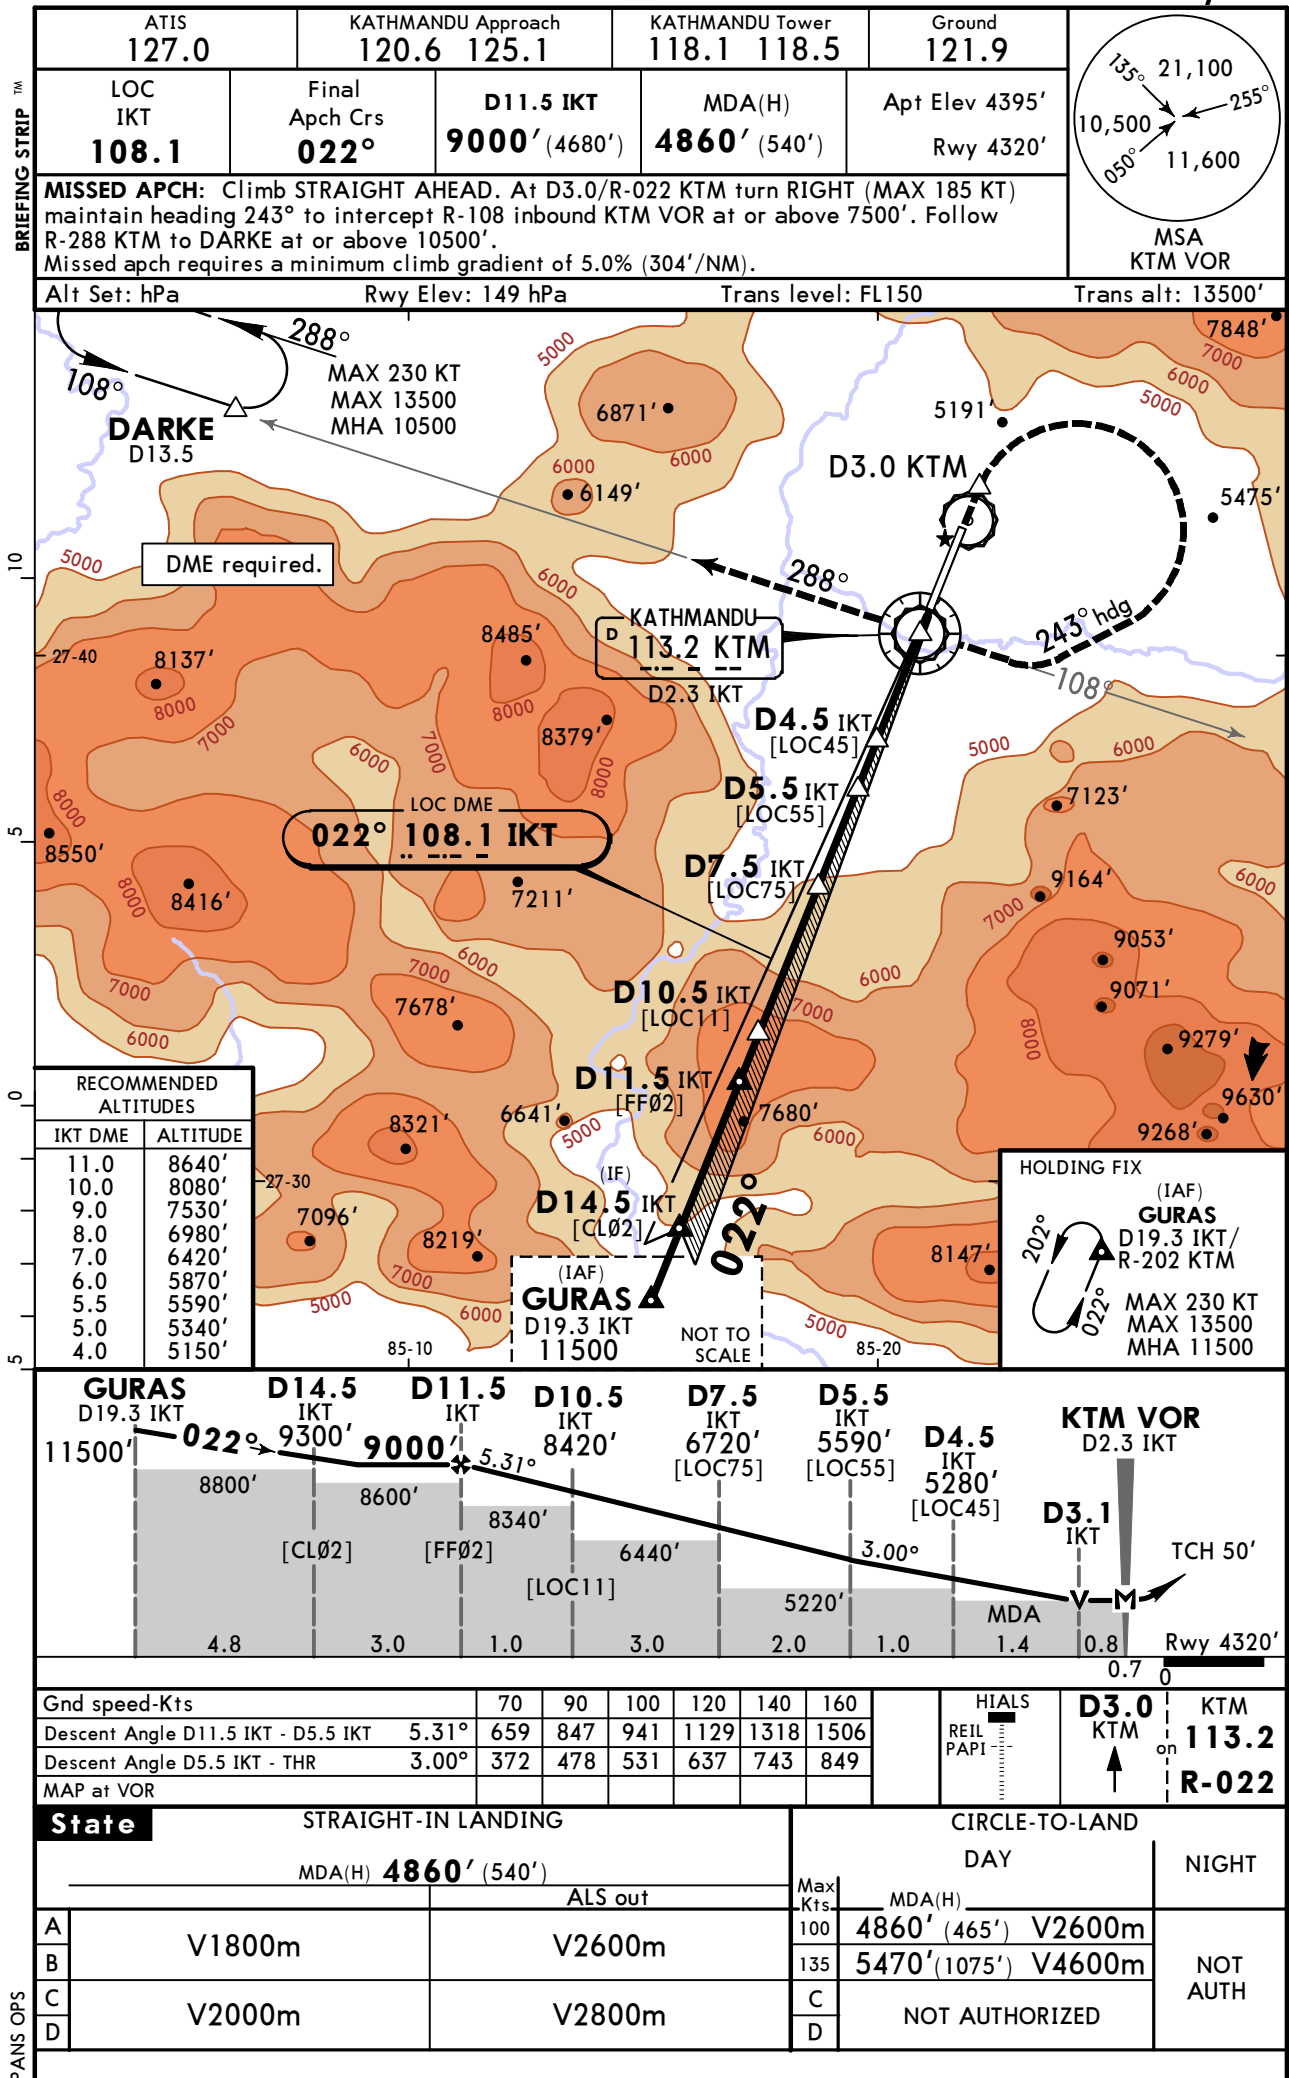


3 MAR 23 (12:20)

ATIS 127.0	KATHMANDU Approach 120.6	KATHMANDU Tower 125.1	118.1	118.5	Ground 121.9
RNAV	Final Apch Crs 022°	MANDATORY 8700' (4380') 4620' (300')	RNP 0.30 DA(H)	Apt Elev 4395' Rwy 4320'	



MISSED APCH: Climb to 10500' via RNP (AR) missed approach to DANFE. At DANFE hold or start a new approach.
If able to reach 10500' before DARKE, request ATC clearance to hold over DARKE.
Missed apch RNP 0.30 until DARKE.

Alt Set: hPa Rwy Elev: 149 hPa Trans level: FL150 Trans alt: 13500'



RNP AR apch.
Authorization required.
RF required.
For non-baro compensated Acft:
Minimum temperature -10°C.

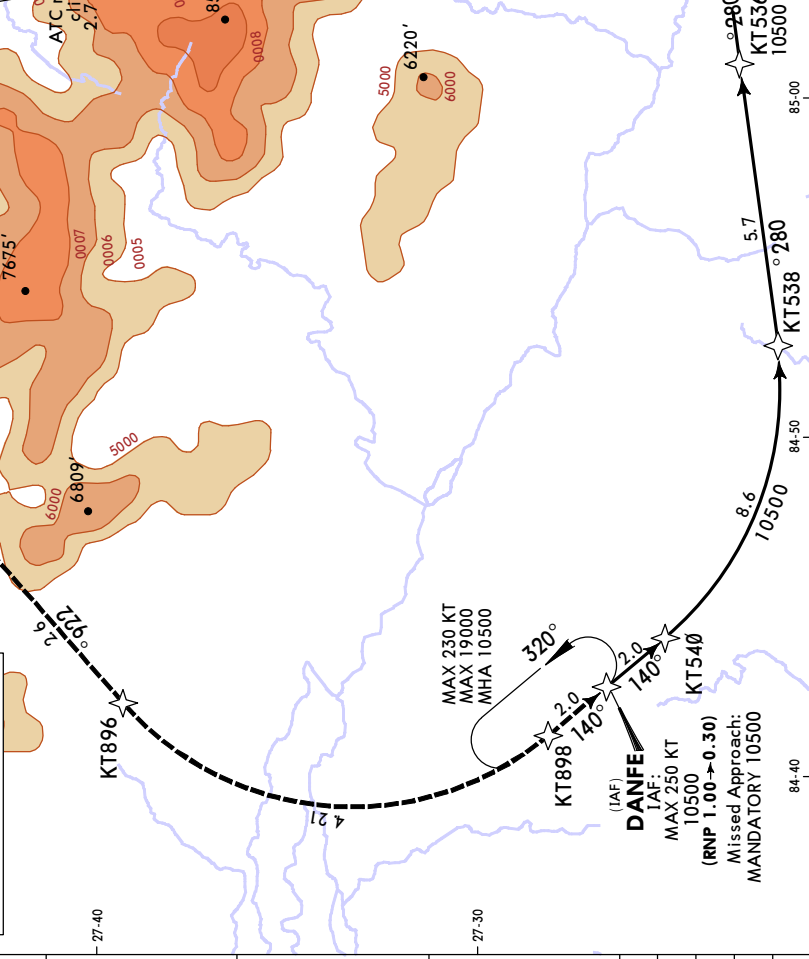


Grd speed Kts	70	90	100	120	140	160	HAIALS	Refer to Missed Apch above
Glide Path Angle	2.80°	3.47	4.46	4.95	5.94	6.93	REL FAP	
STRAIGHT-IN LANDING								
RNP 0.30 DA(H) 4620' (300')								ALS out
A	V1100m							V2000m
B								
C								
D								

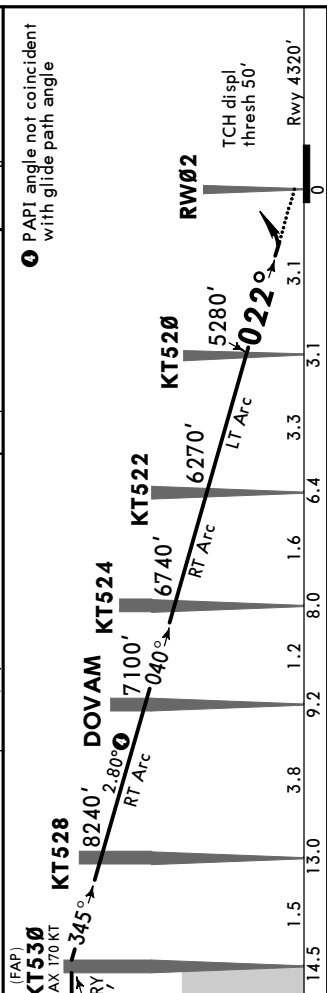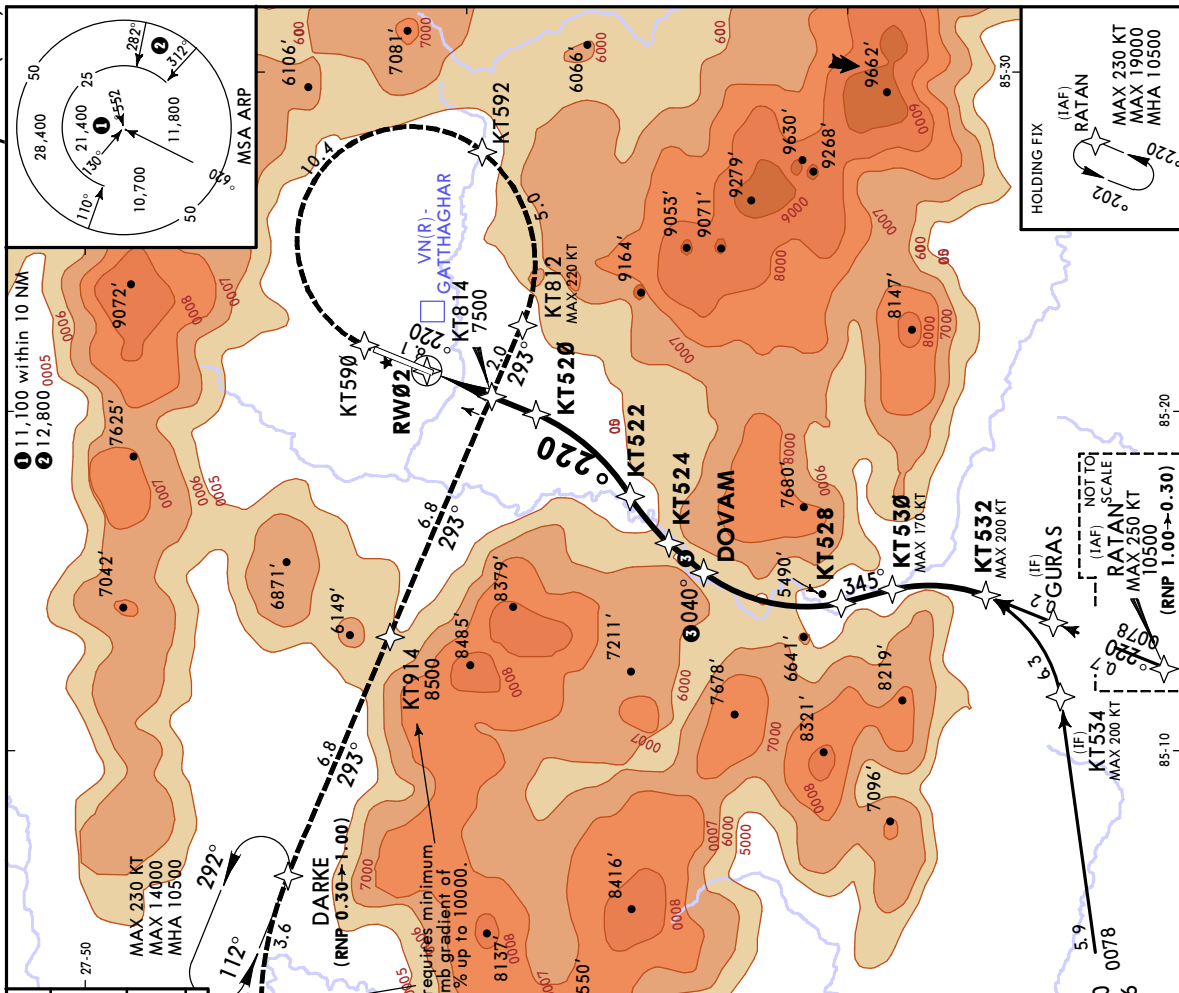

The topographic map displays contour lines at 100-foot intervals, ranging from 5000 to 10000 feet. Two specific elevation points are marked: 8252' and 9072'. A blue line indicates a water feature or boundary. A compass rose is located in the upper right corner. An inset map in the upper left corner shows the location of the study area within the MSA ARP, with a scale from 0 to 50 and a north arrow.

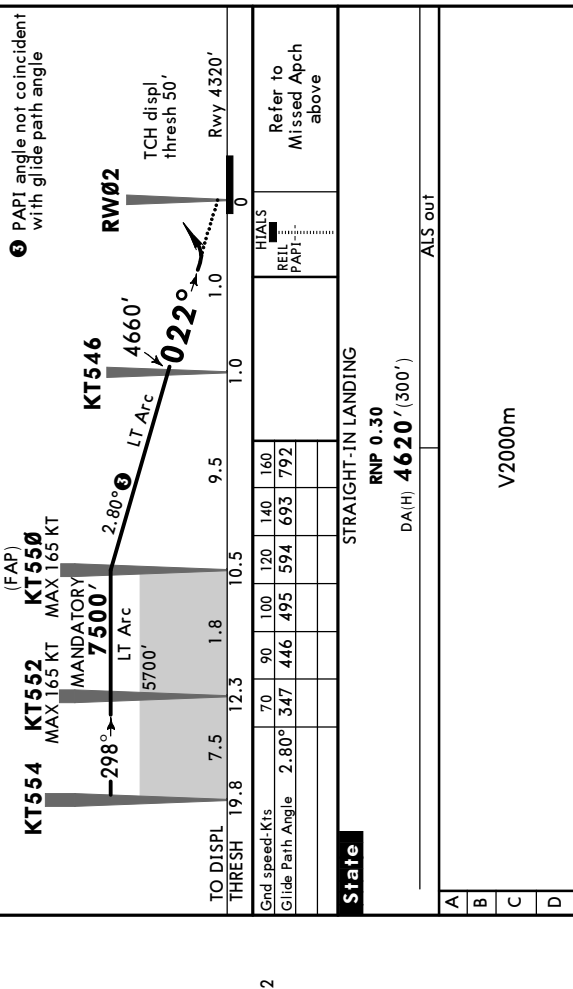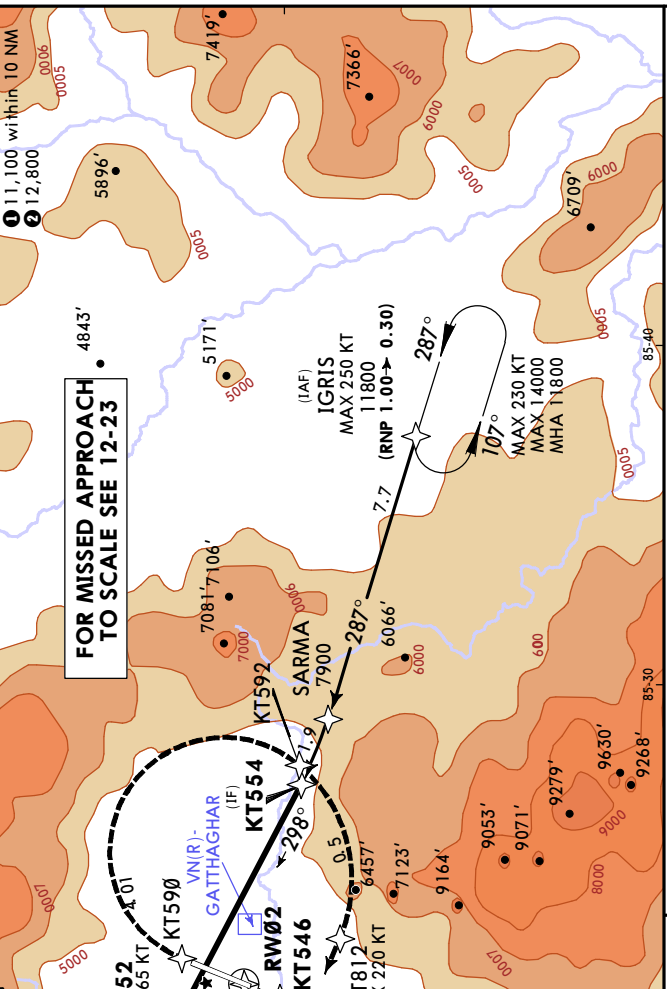


ATIS 127.0		KATHMANDU Approach 120.6 125.1		KATHMANDU Tower 118.1 118.5		Ground 121.9
RNAV	Final Apch Crs	Refer to chart 12-21 or 12-22		DA(H) Refer to chart 12-21 or 12-22		Apft Elev 4395'
	022°					Rwy 4320'
MISSSED APCH: Climb to 10500' via RNP (AR) missed approach to DANFE. At DANFE hold or start a new approach. If able to reach 10500' before DARKE, request ATC clearance to hold over DARKE. Missed apch RNP 0.30 until DARKE.						
Alt Set: hPa		Rwy Elev: 149 hPa		Trans level: FL150		Trans alt: 13500'
RNP AR Apch						
1. Authorization required. 2. RF required. 3. For non-baro compensated Acft: minimum temperature -10°C.						

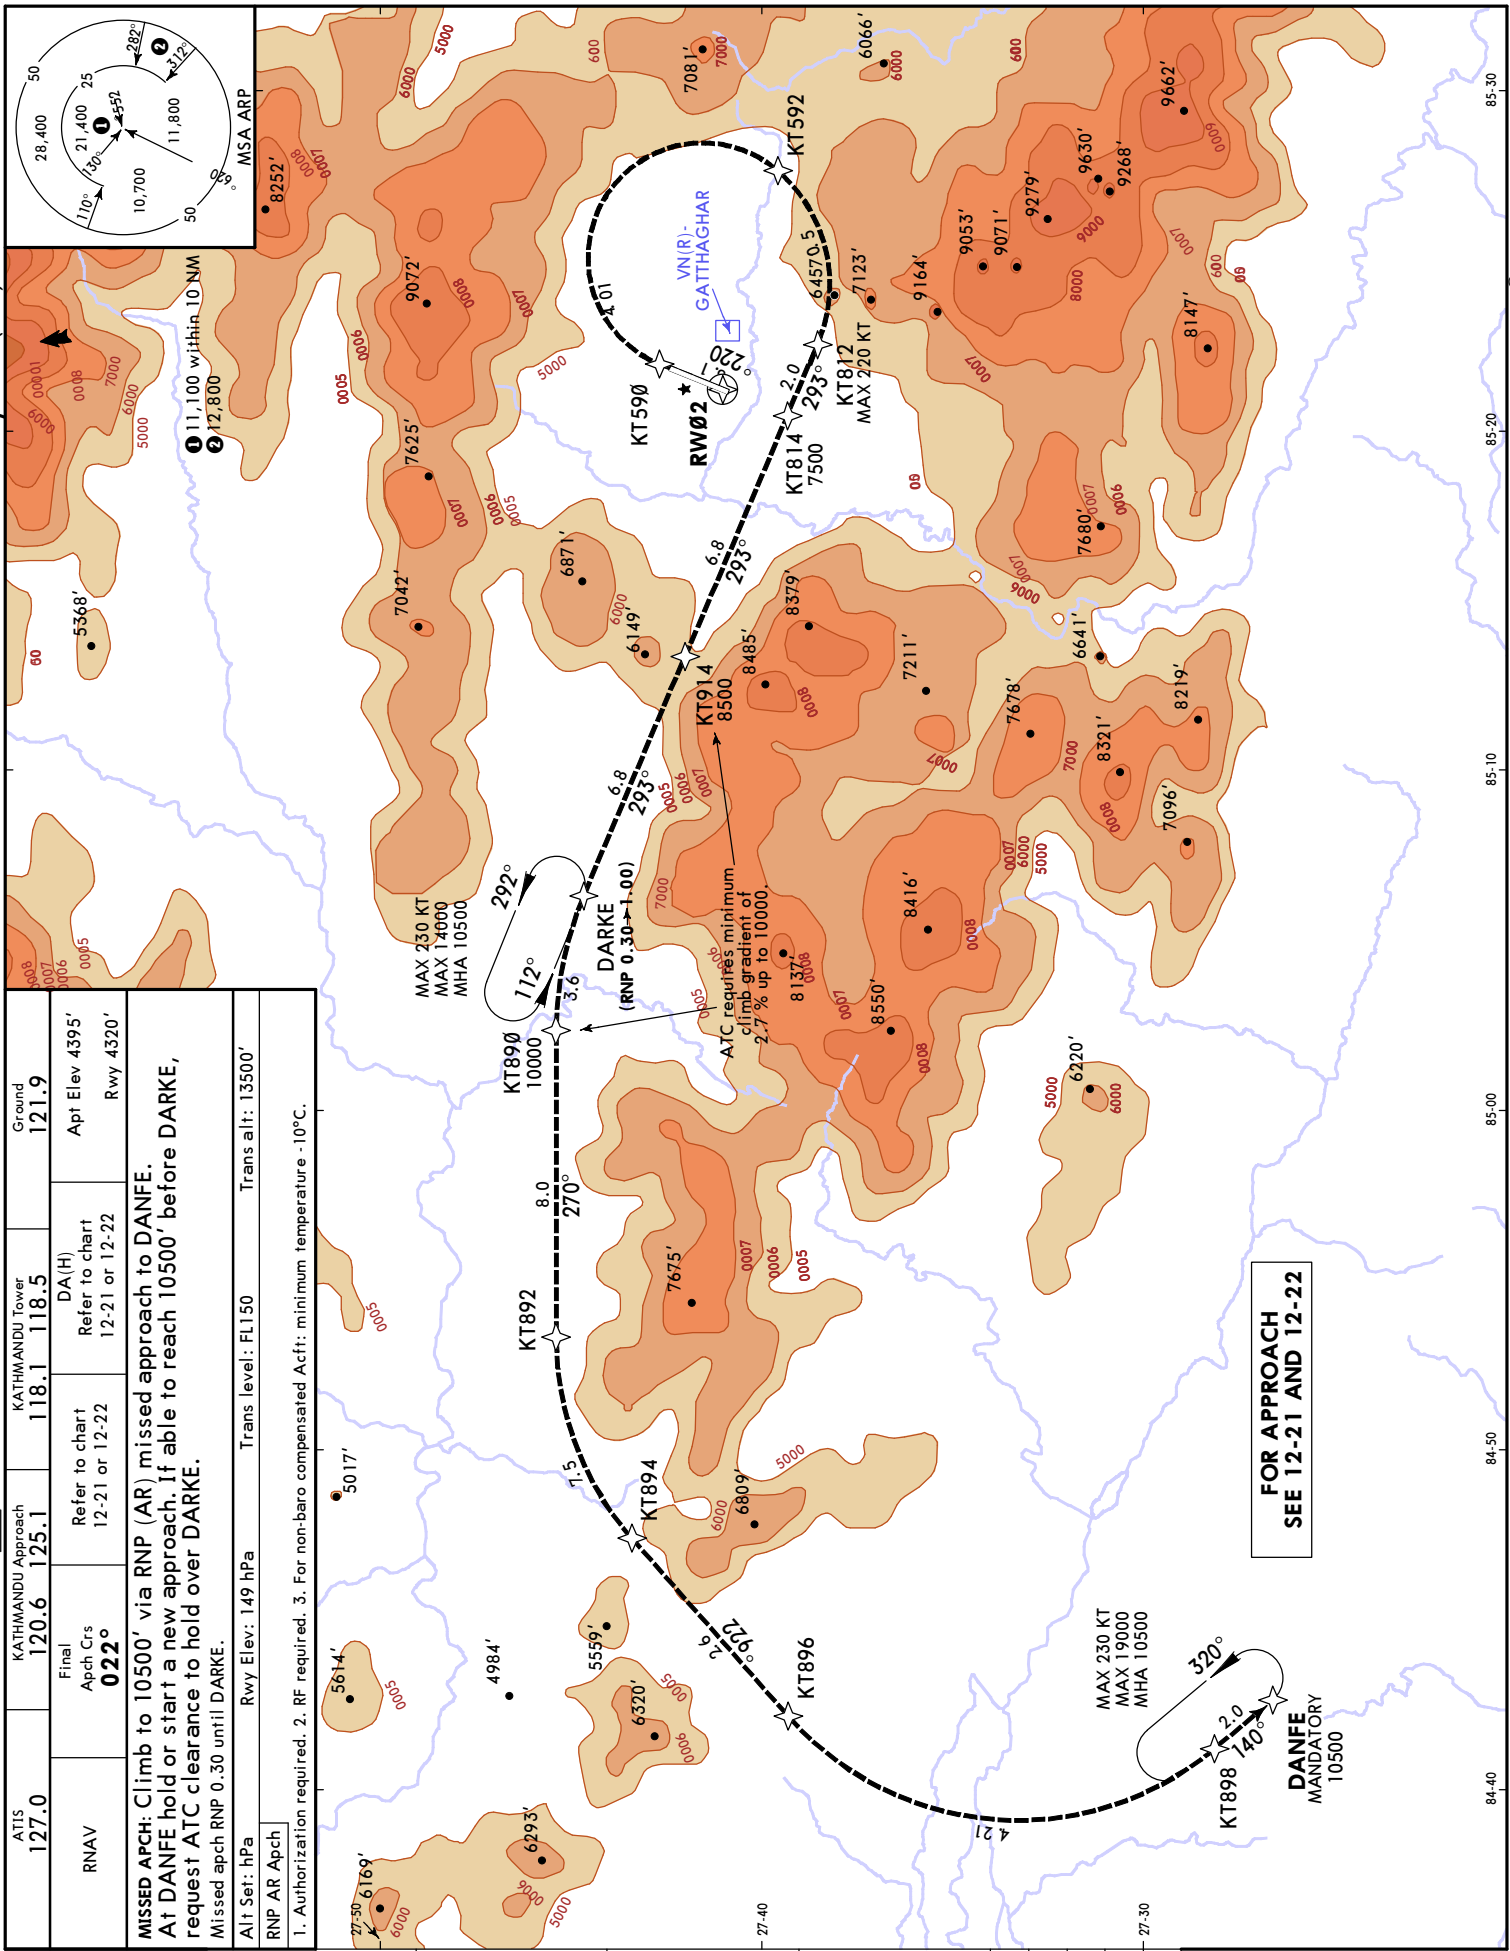

KATHMANDU, NEPAL
RNP Rwy 20 (AR)

VNKT /KTM
TRIBHUVAN INTL

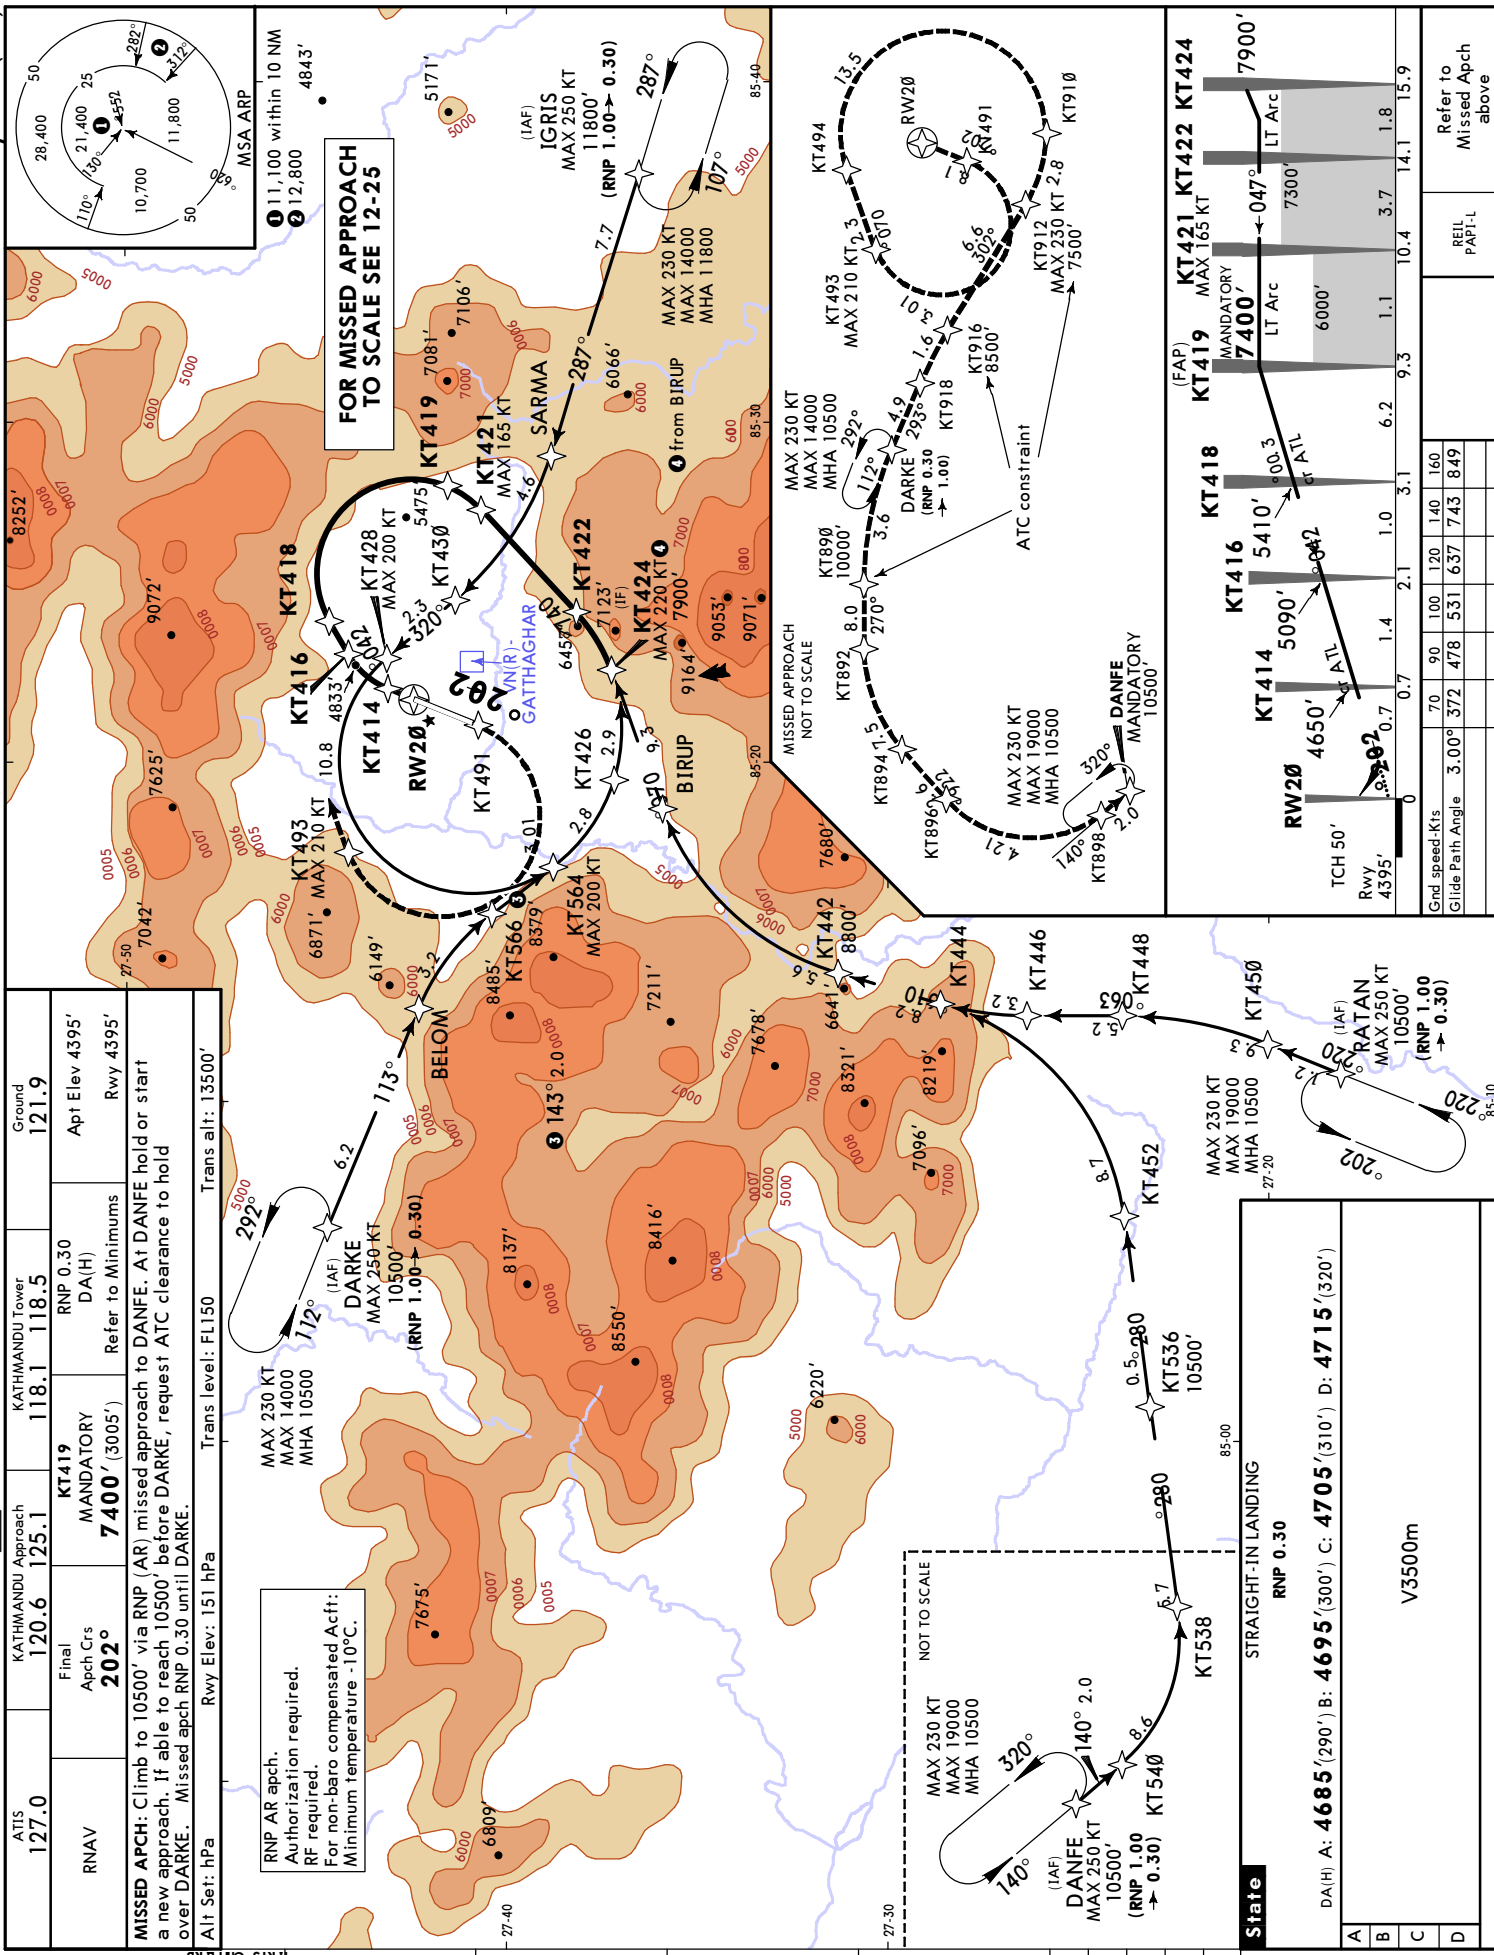




VNKT/KTM
TRIBHUVAN INTL

12 AUG 22 (13-1)

MISSED APCH CLIMB
GRADIENT MIN 5.0%


KATHMANDU, NEPAL
VOR Rwy 02

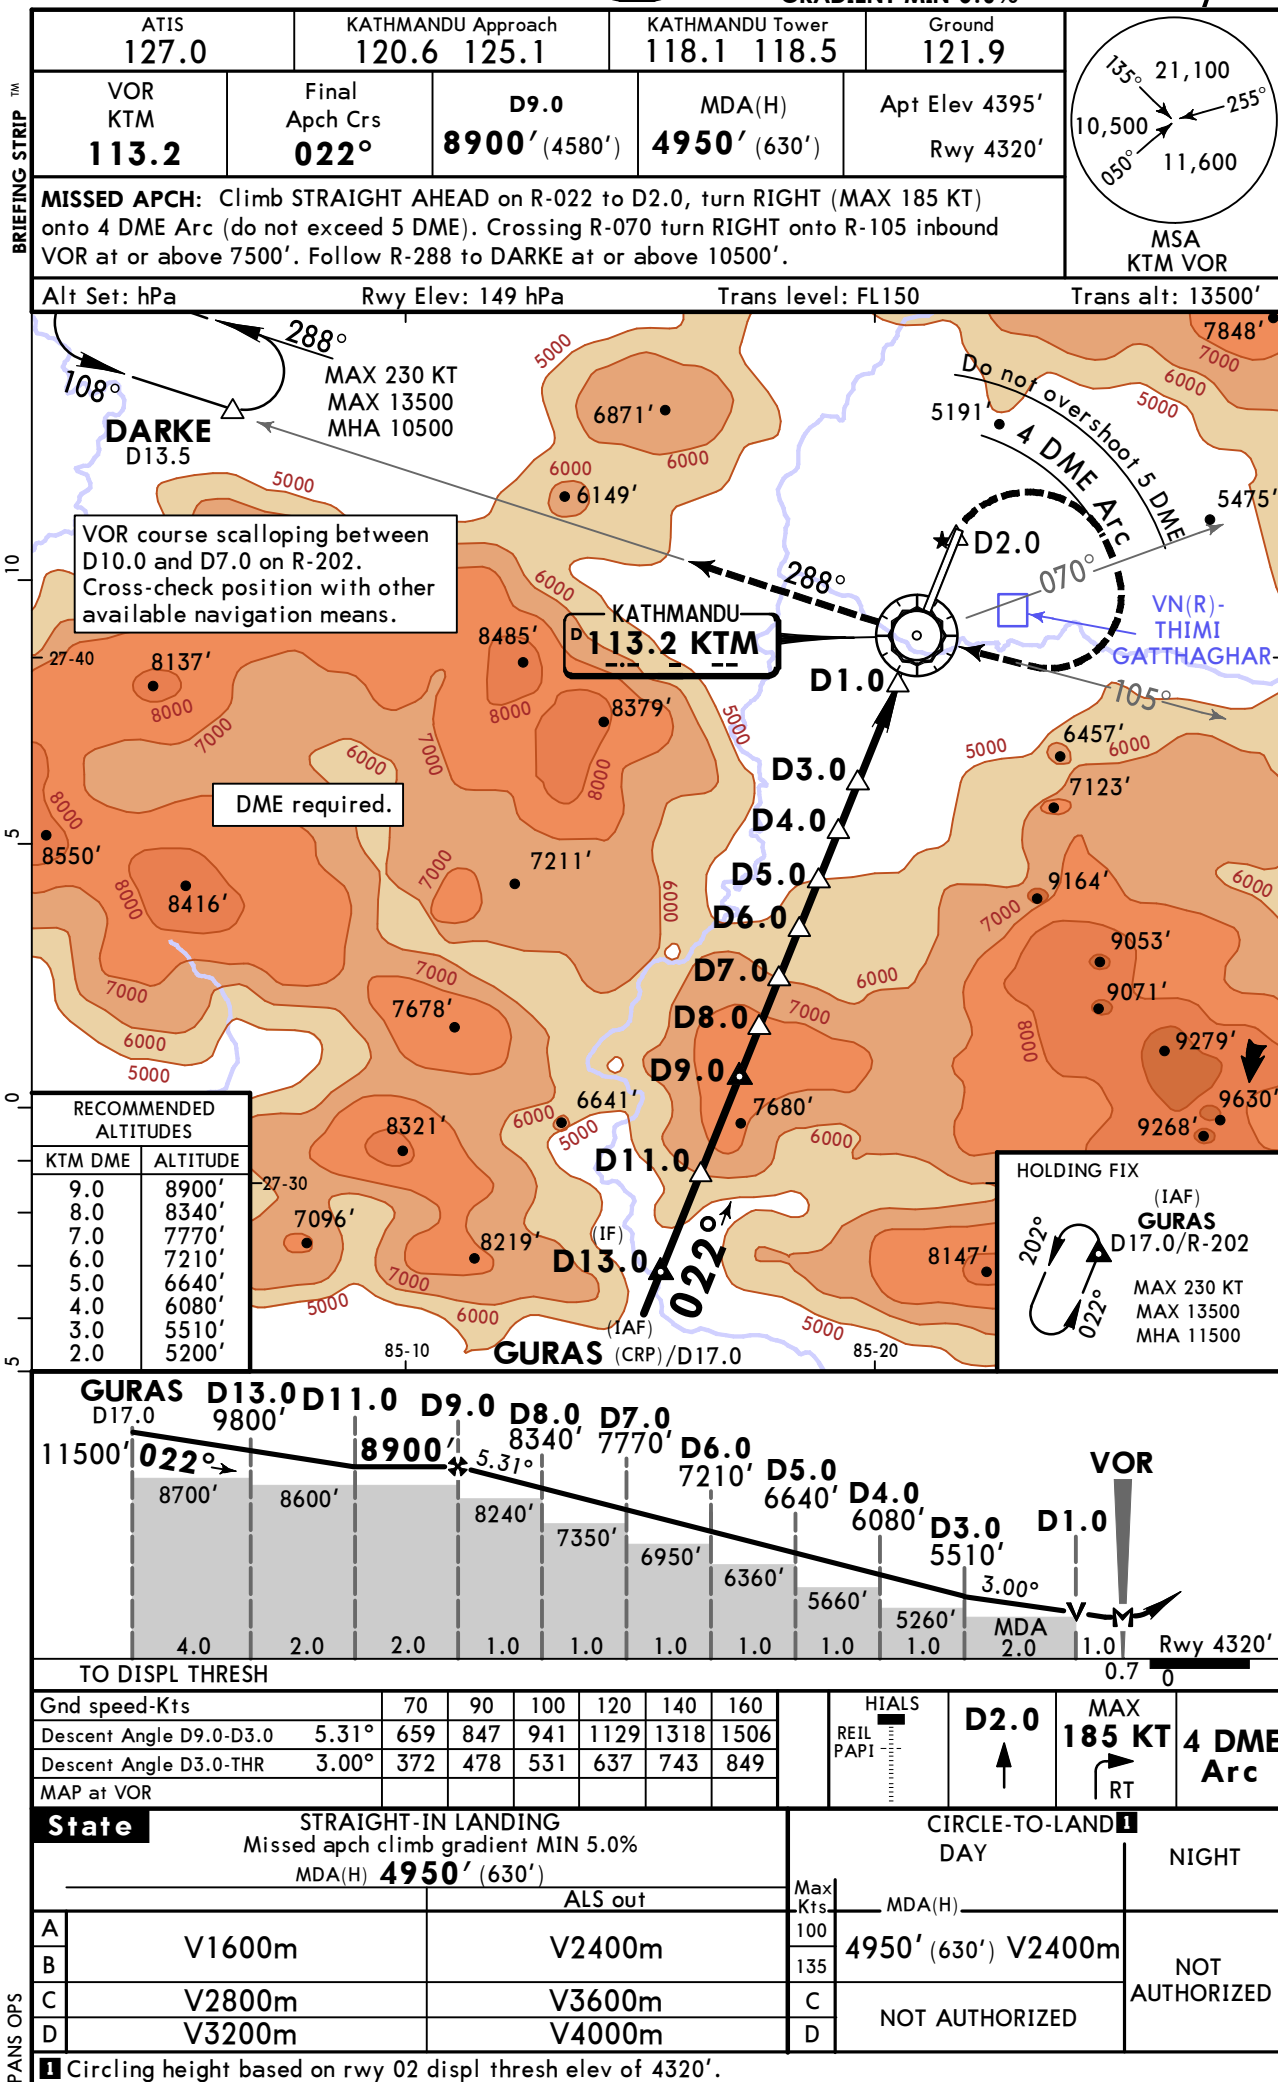

VNKT/KTM TRIBHUVAN INTL

12 AUG 22 **13-2** **CAT A & B**

KATHMANDU, NEPAL
MISSED APCH CLIMB
GRADIENT MIN 5.8% **VOR-A**

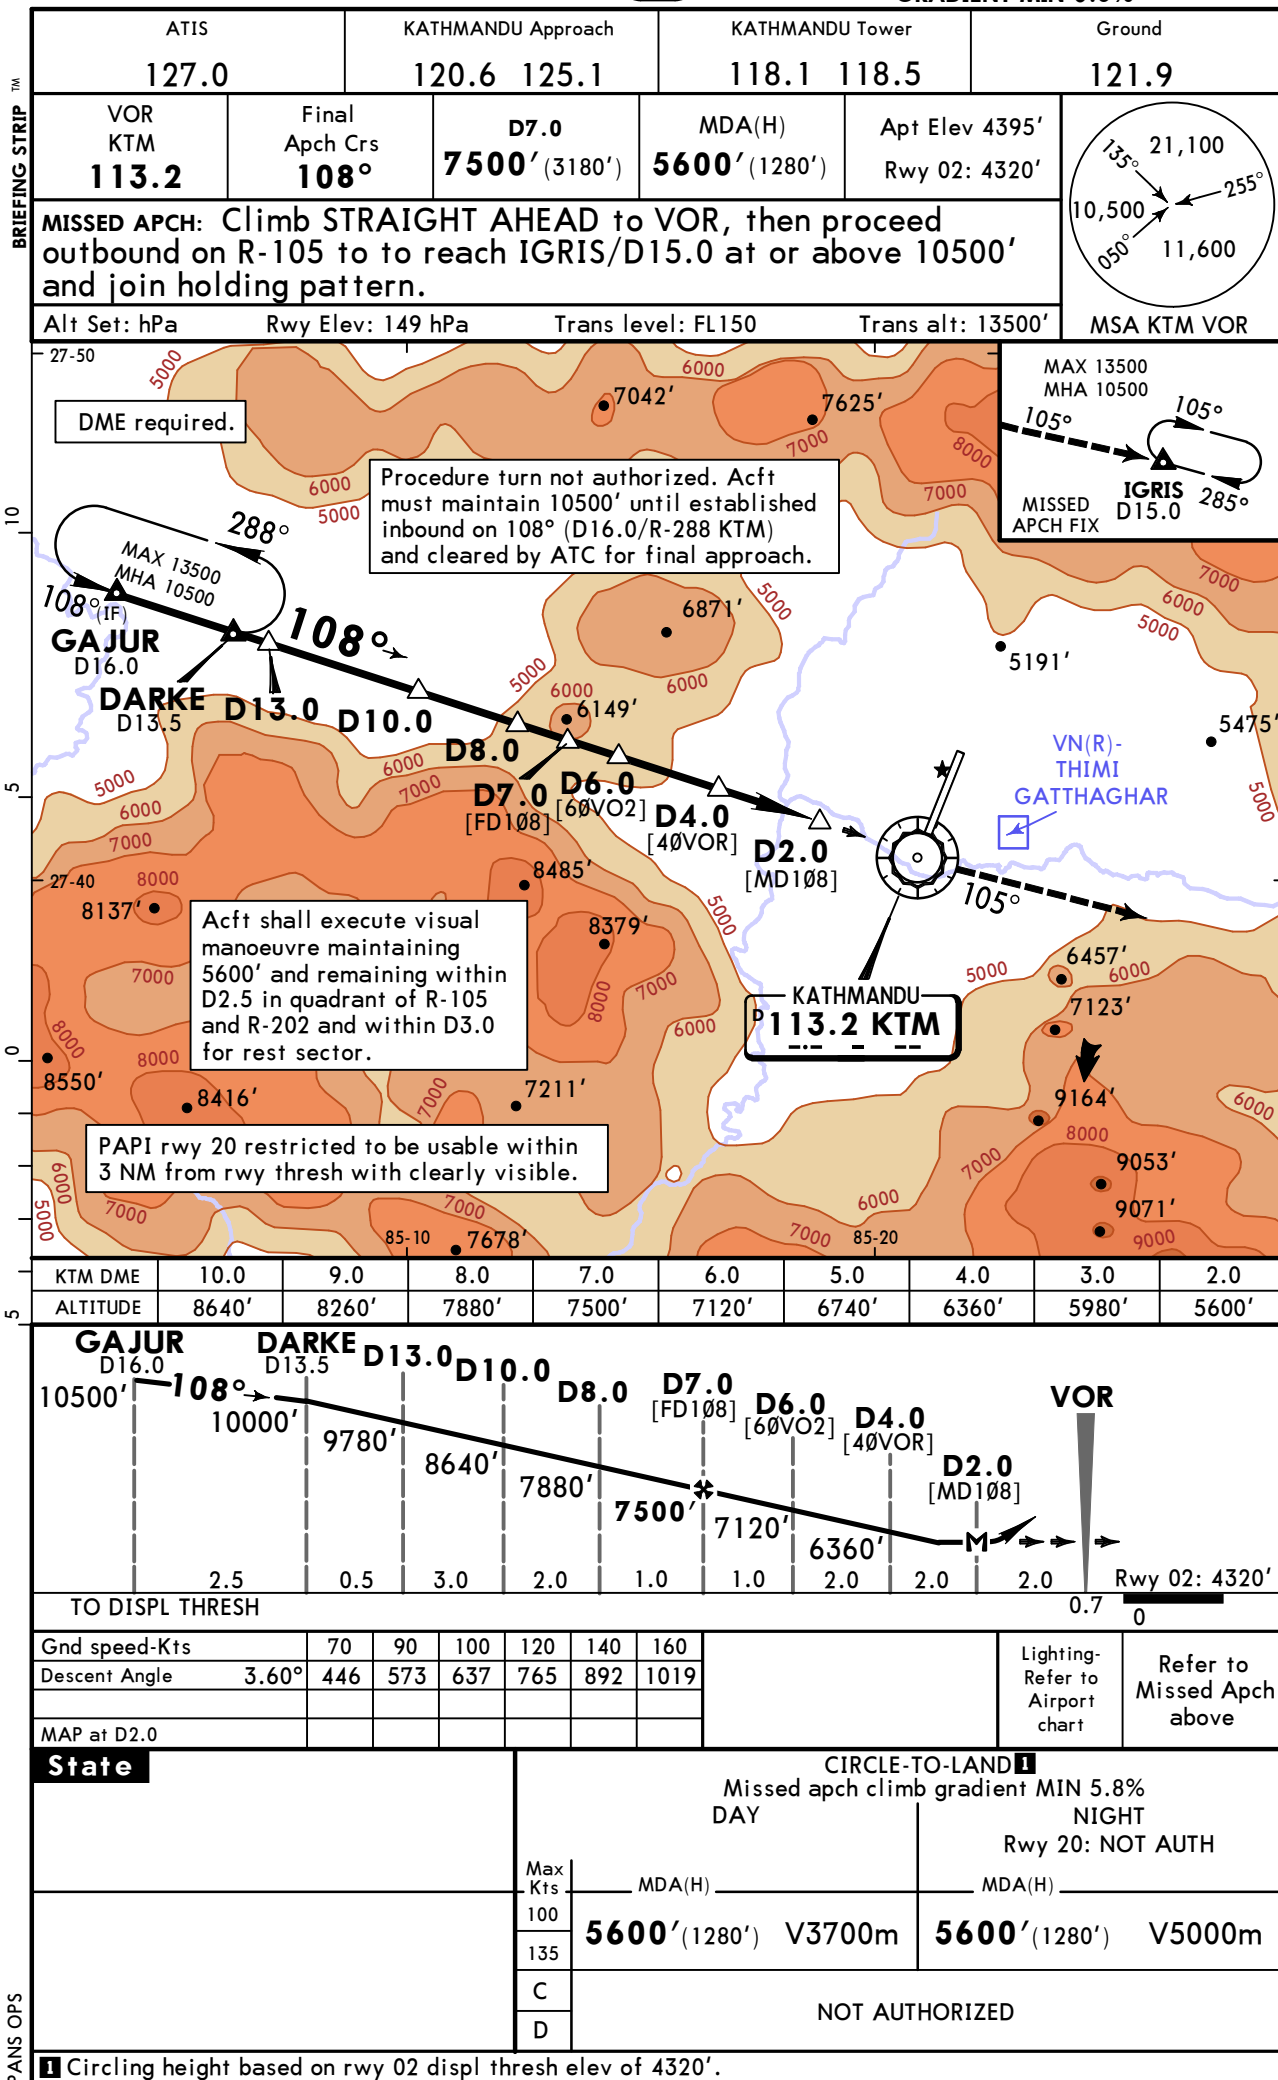

VNKT/KTM
TRIBHUVAN INTL

25 APR 25 (13-3)

KATHMANDU, NEPAL
VOR-B

CAT A & B

